



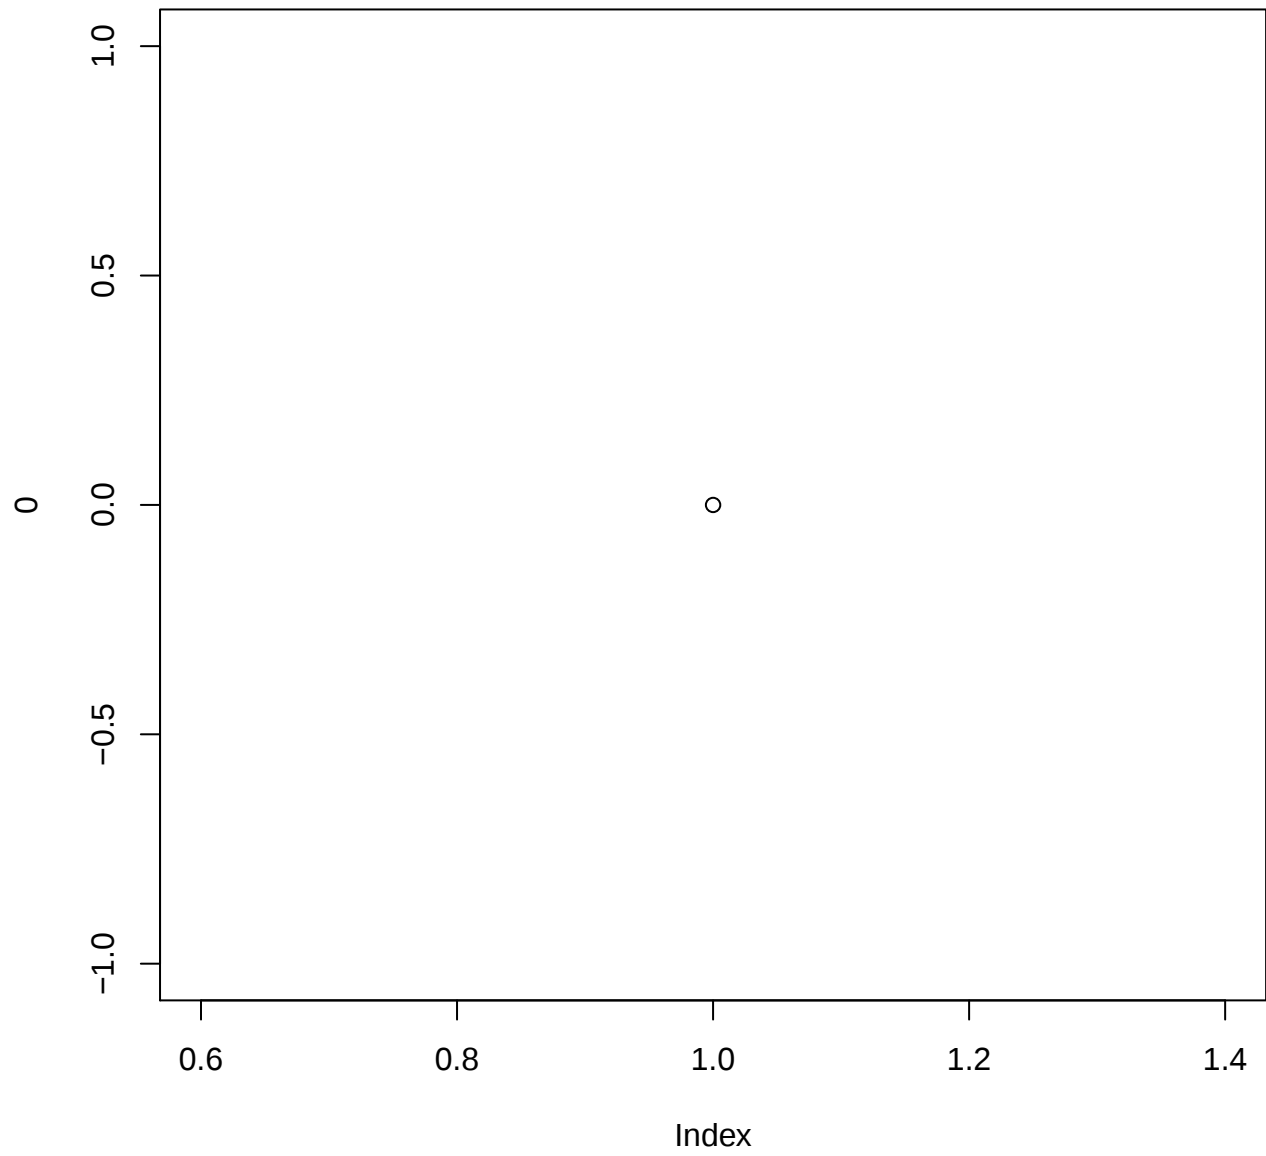


Centred chars in default char set (ISO Latin1)


15	õ	ñ	ò	ó	ô	õ	ö	÷	ø	ù	ú	û	ü	ý	þ	ÿ
	à	á	â	ã	ä	å	æ	ç	è	é	ê	ë	ì	í	î	ï
	Ð	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú	Û	Ü	Ý	Þ	ß
	À	Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë	Ì	Í	Î	Ï
10	°	±	²	³	´	µ	¶	·	¸	¹	º	»	¼	½	¾	¿
		¡	¢	£	¤	¥	¦	§	¨	©	ª	«	¬	­	®	¯
	p	q	r	s	t	u	v	w	x	y	z	{		}	~	
5	,	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
	P	Q	R	S	T	U	V	W	X	Y	Z	[	\	]	^	_
	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
0		!	"	#	\$	%	&	'	(	)	*	+	,	-	.	/


Death Rates in Virginia – 1940

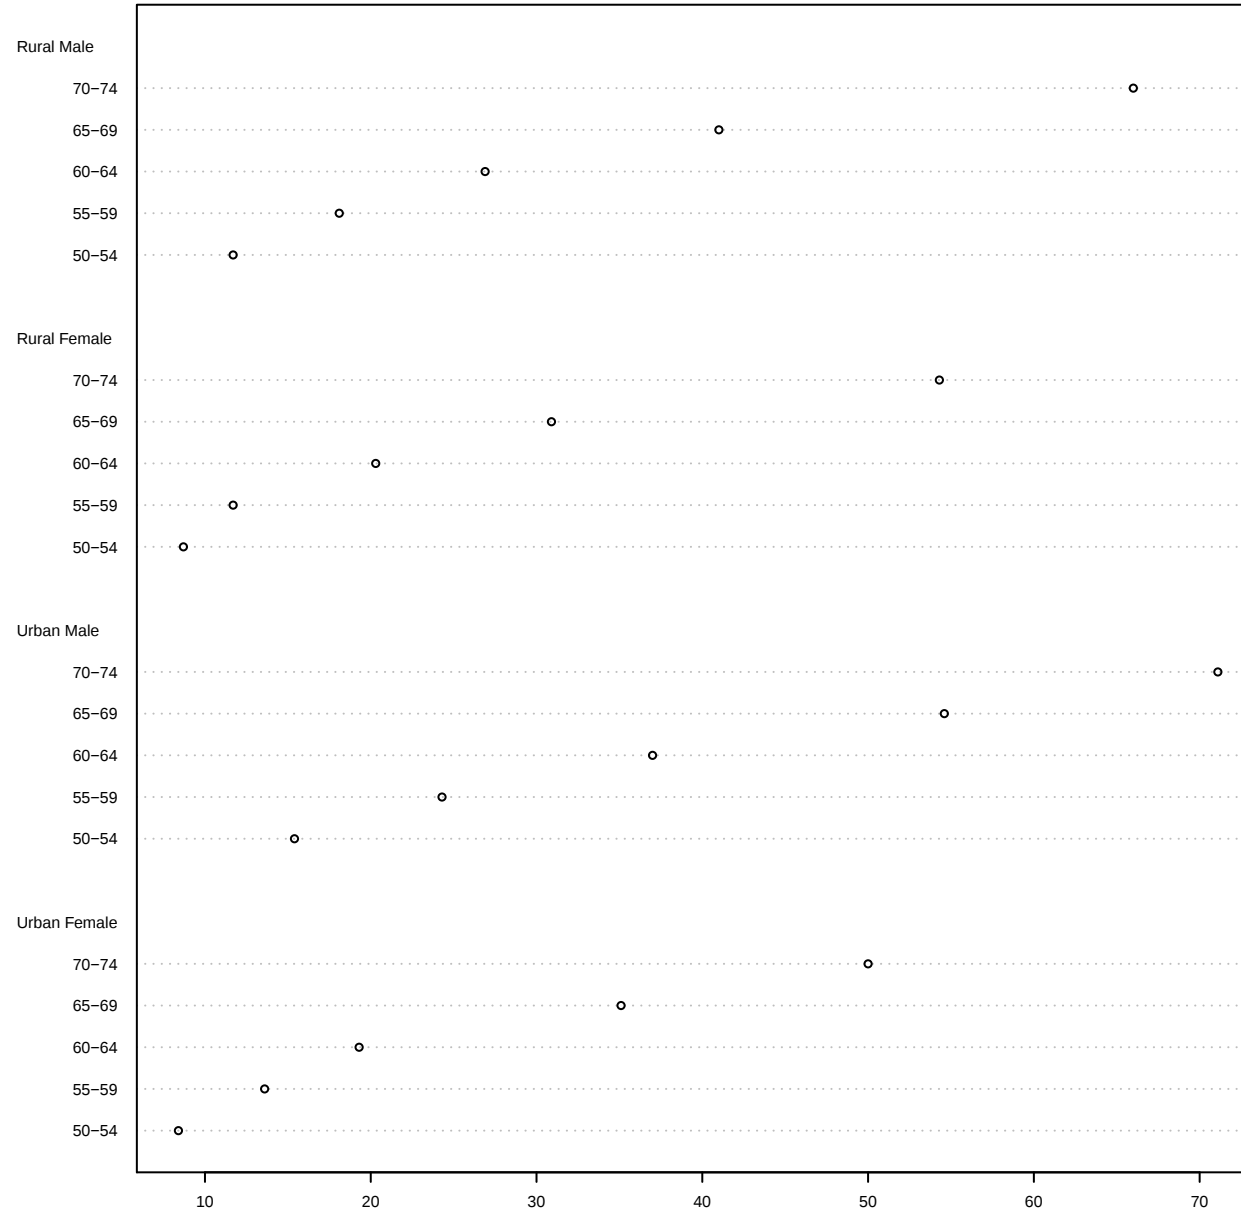



Death Rates in Virginia – 1940

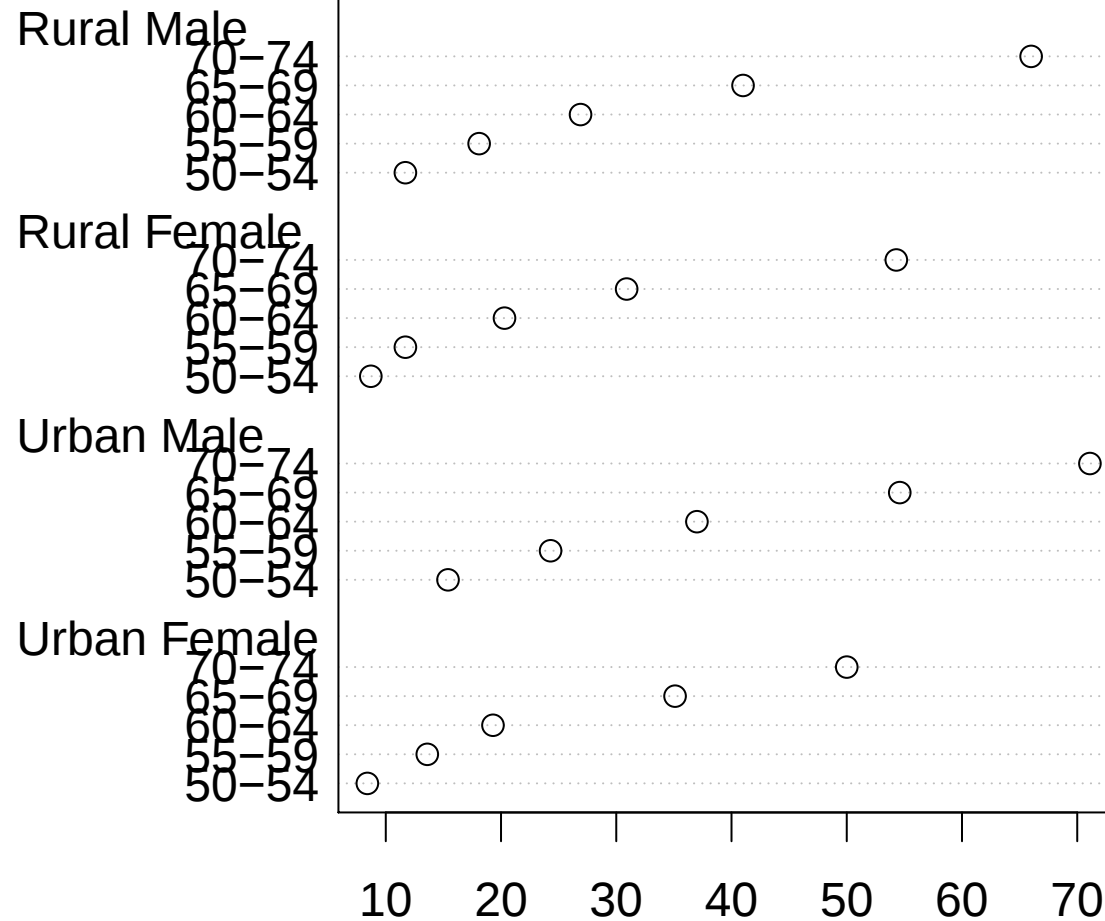

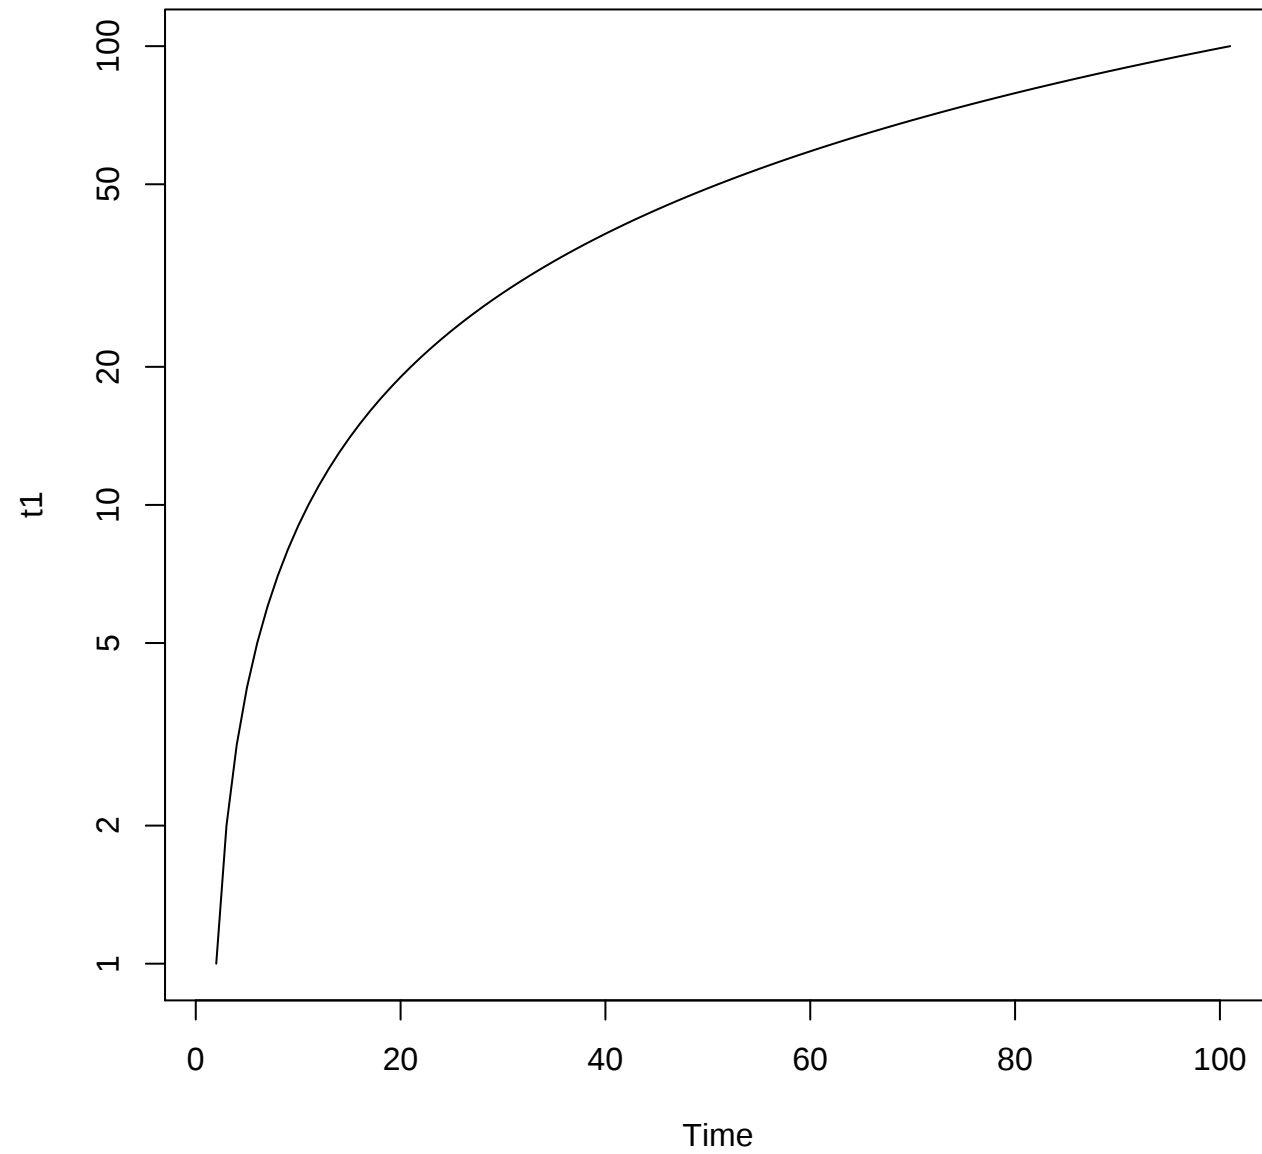


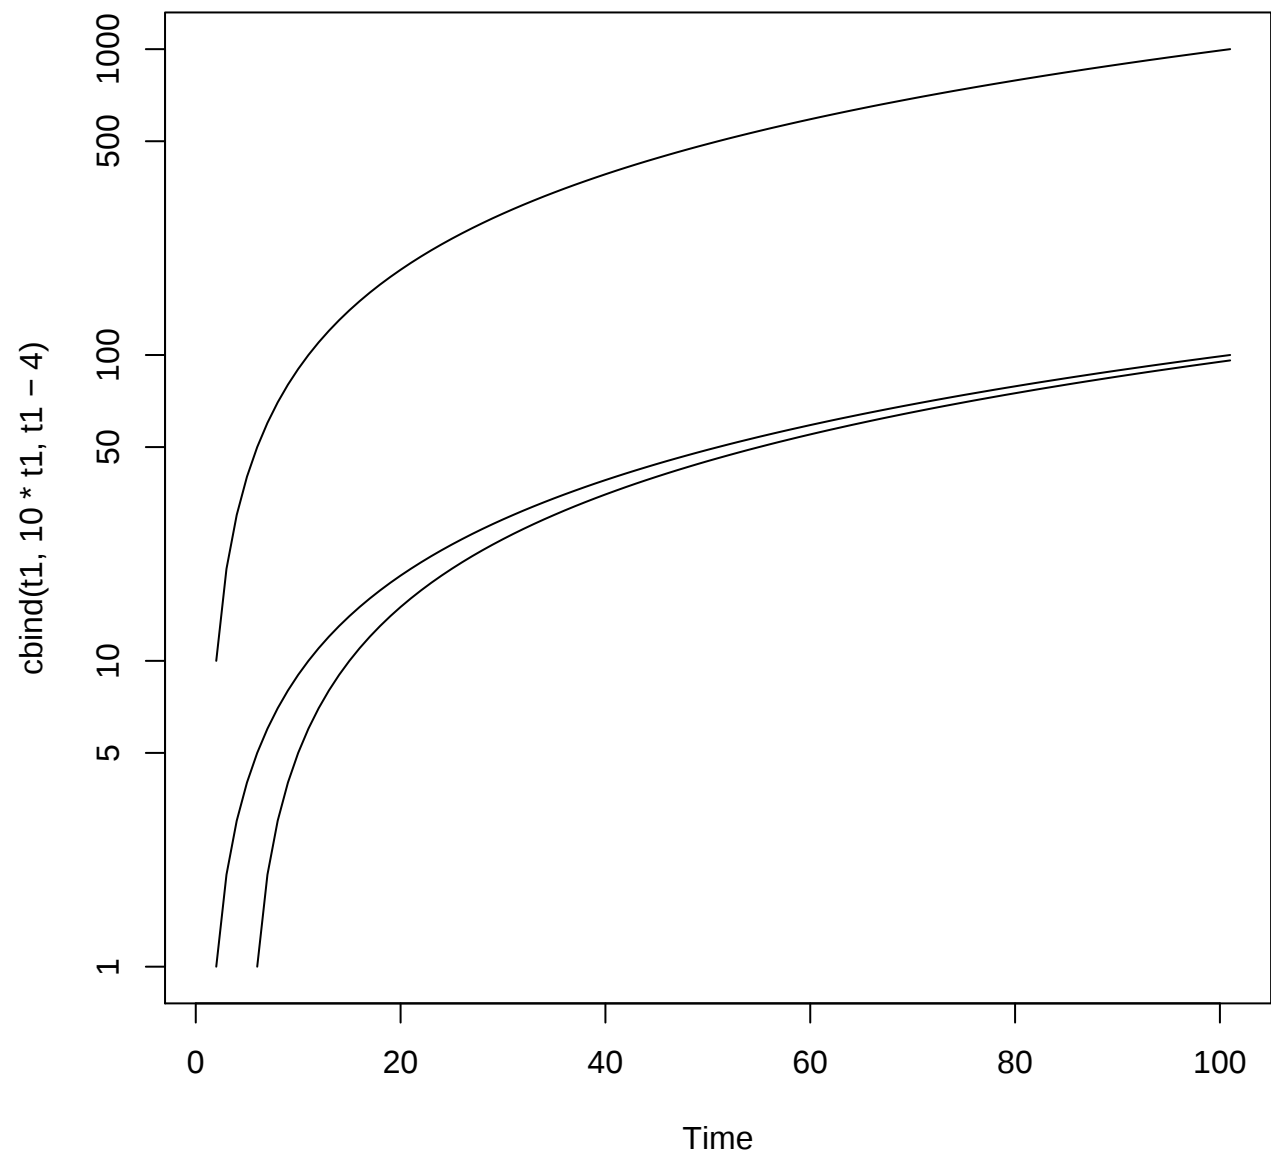

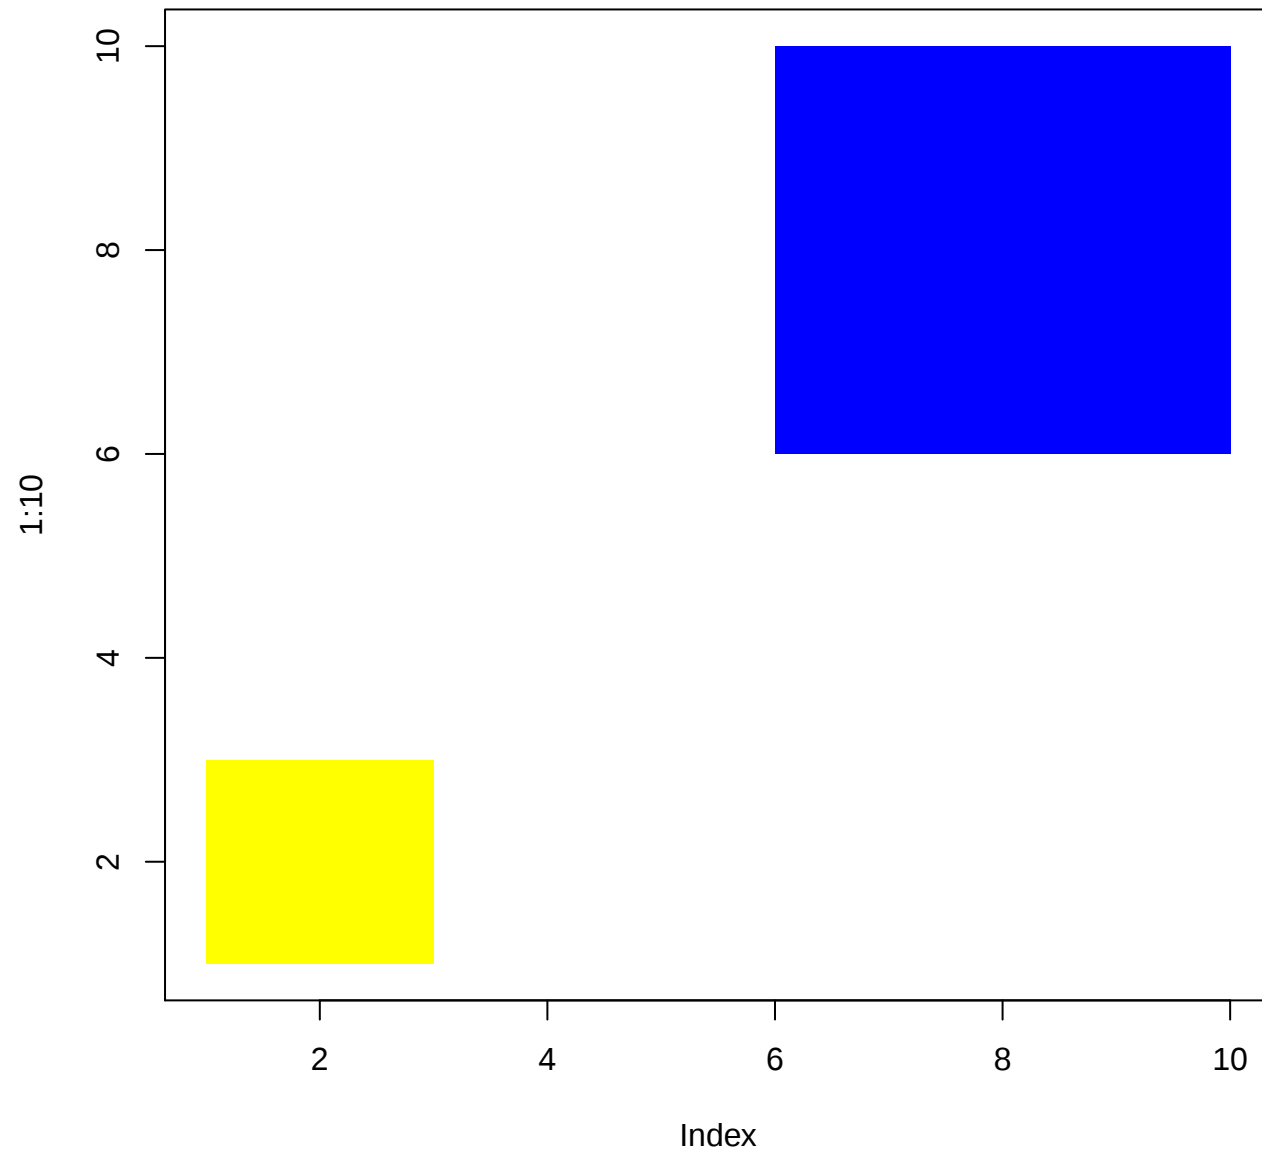


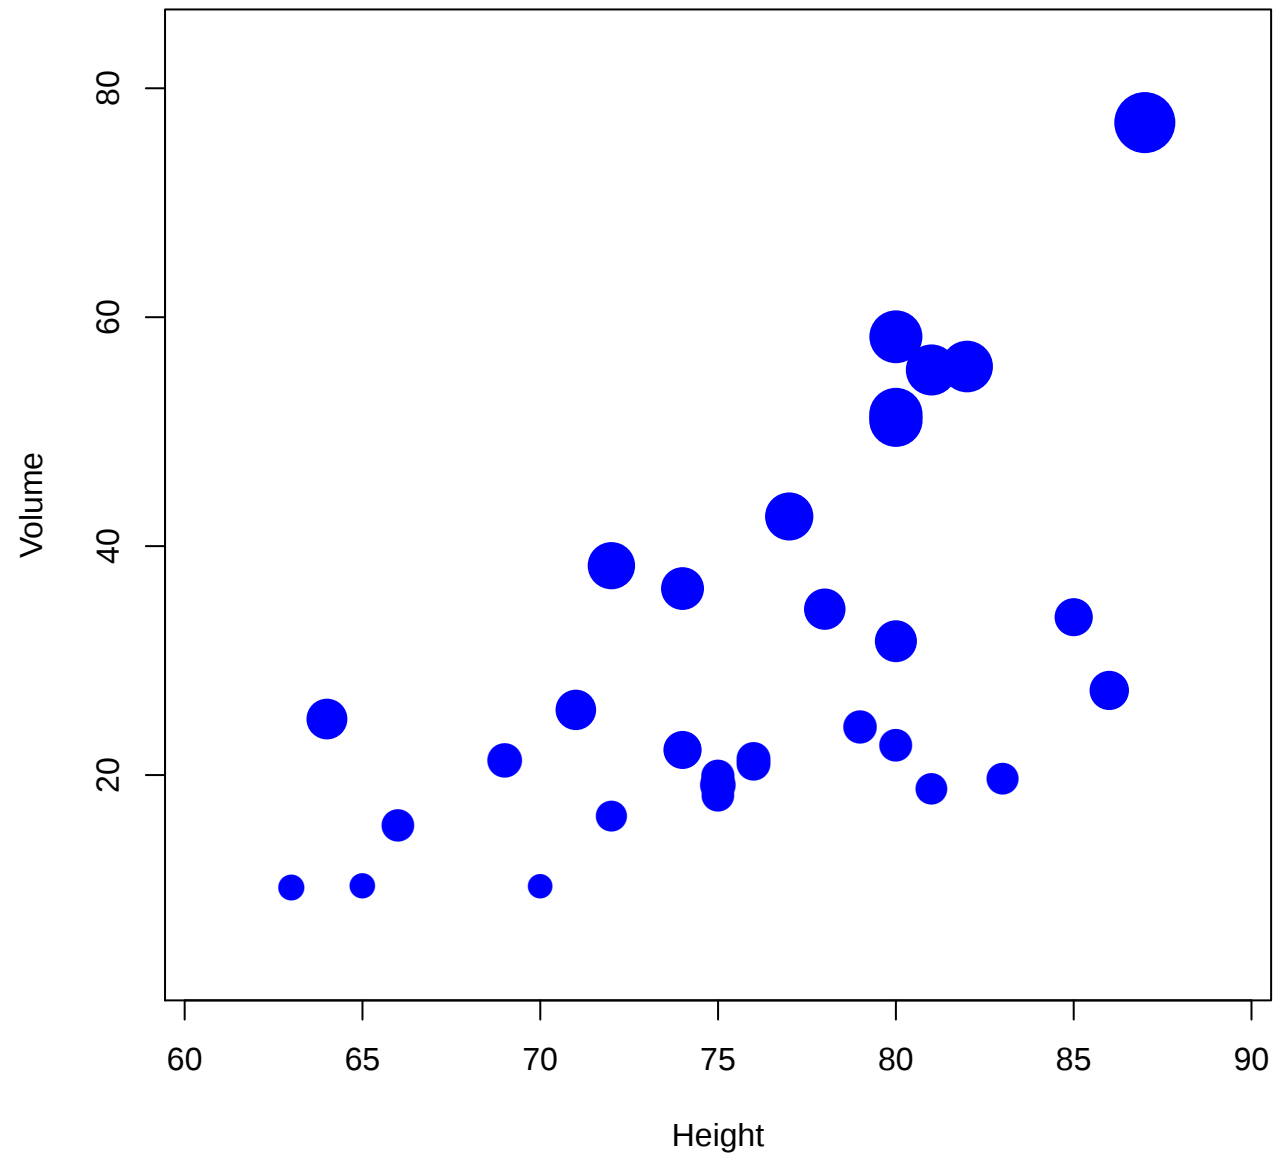


mgp < 0: all ticks and labels inside 'frame'

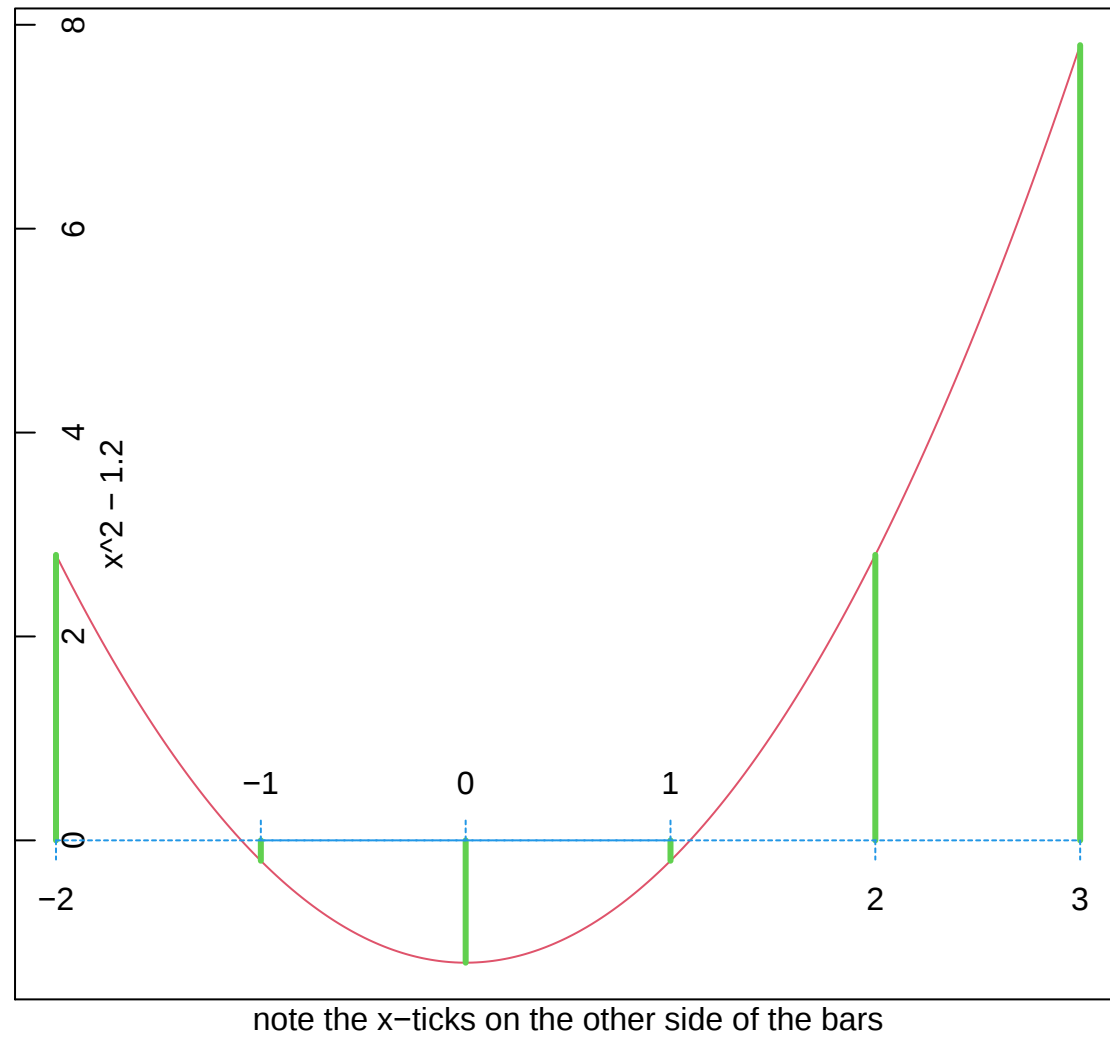


UCBAdmissions

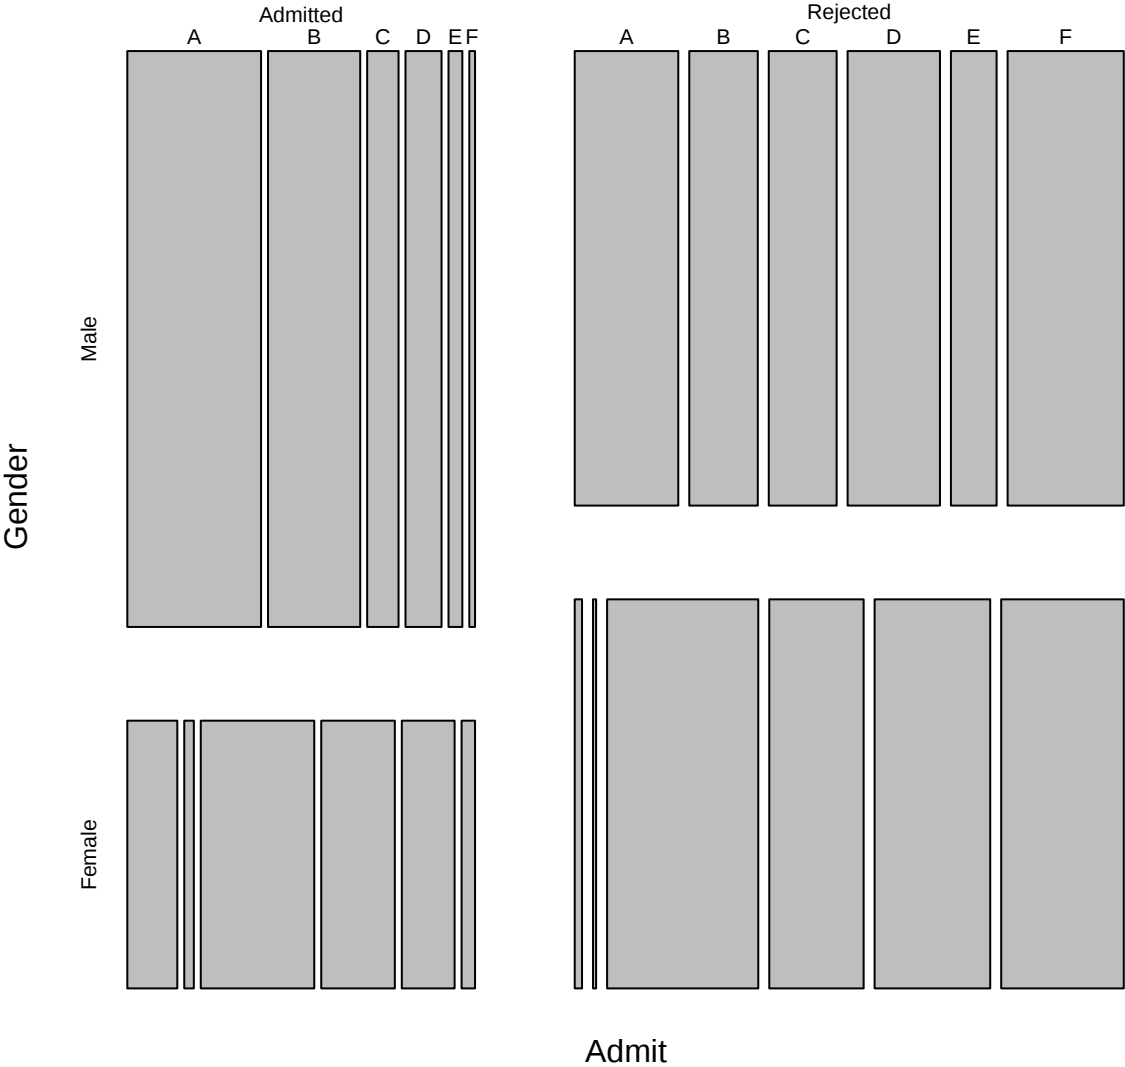



UCBAdmissions

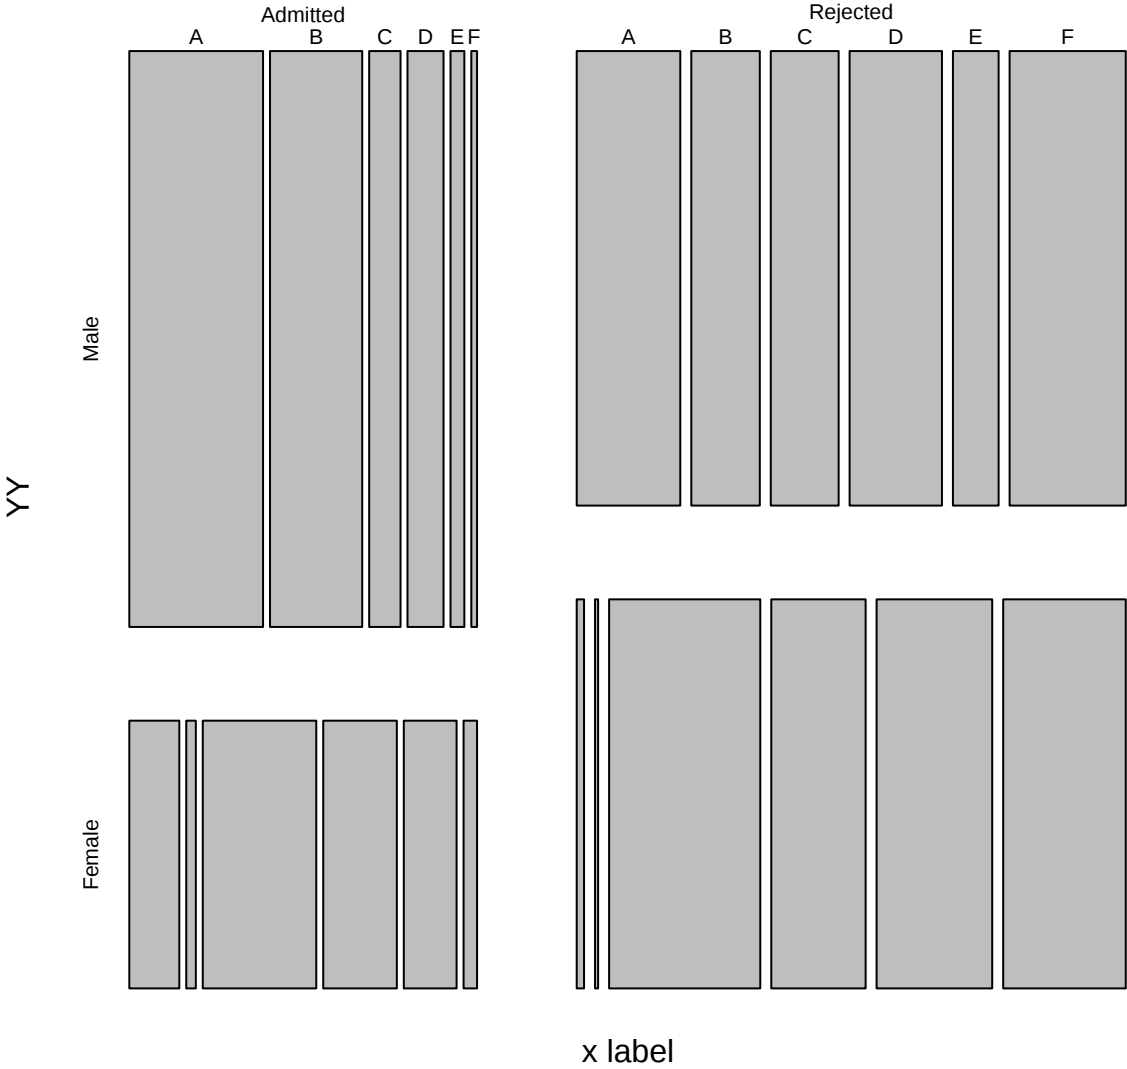



```
tt <- table(c(rep(0, 7), rep(1, 4), rep(5, 3)))
```




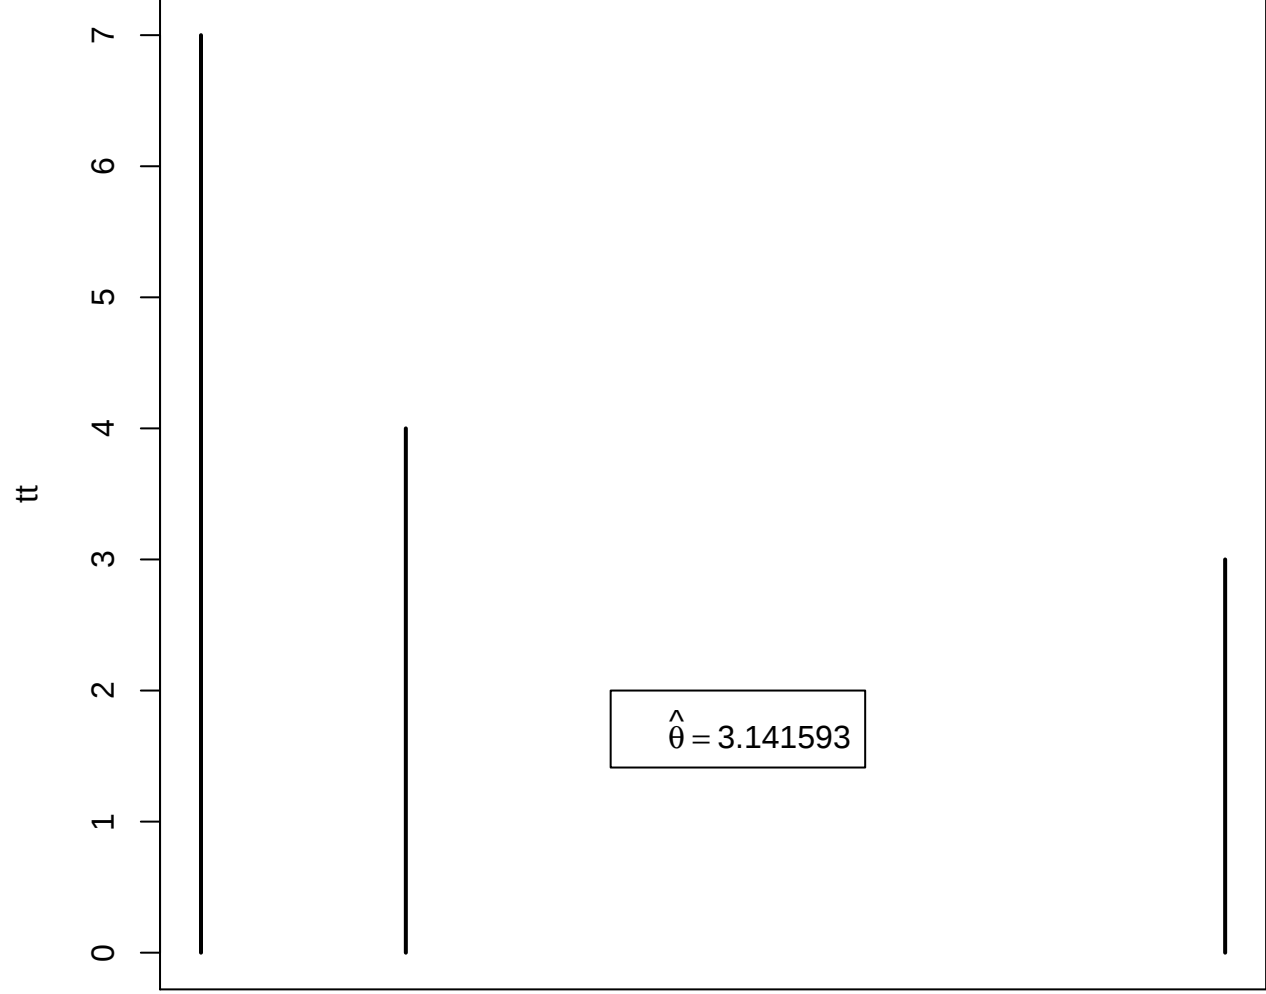


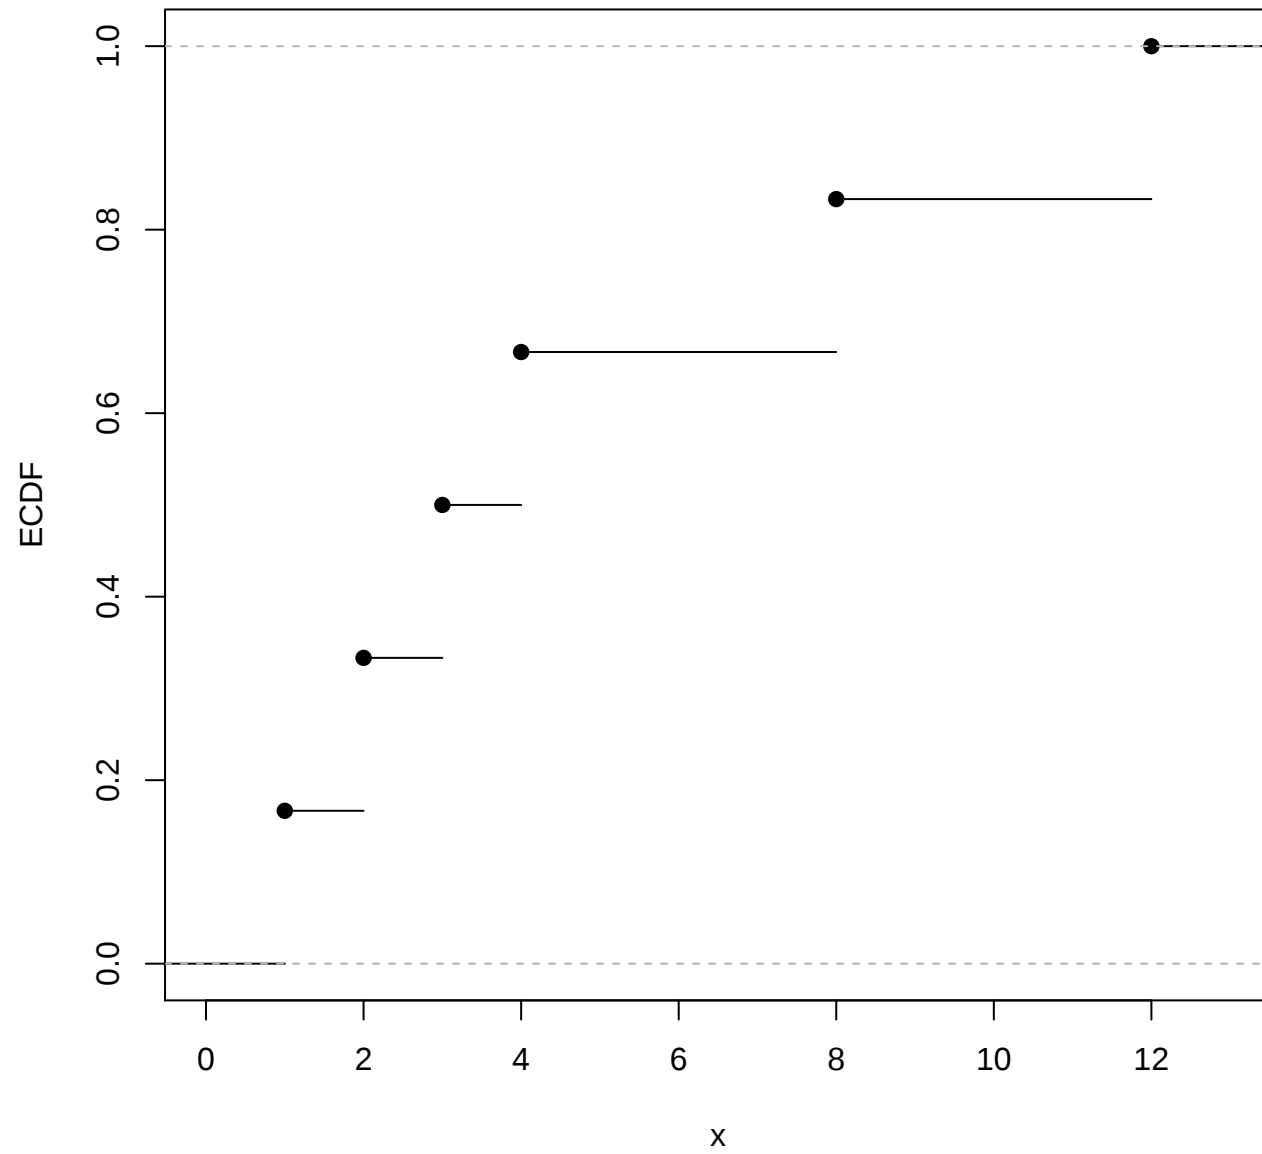

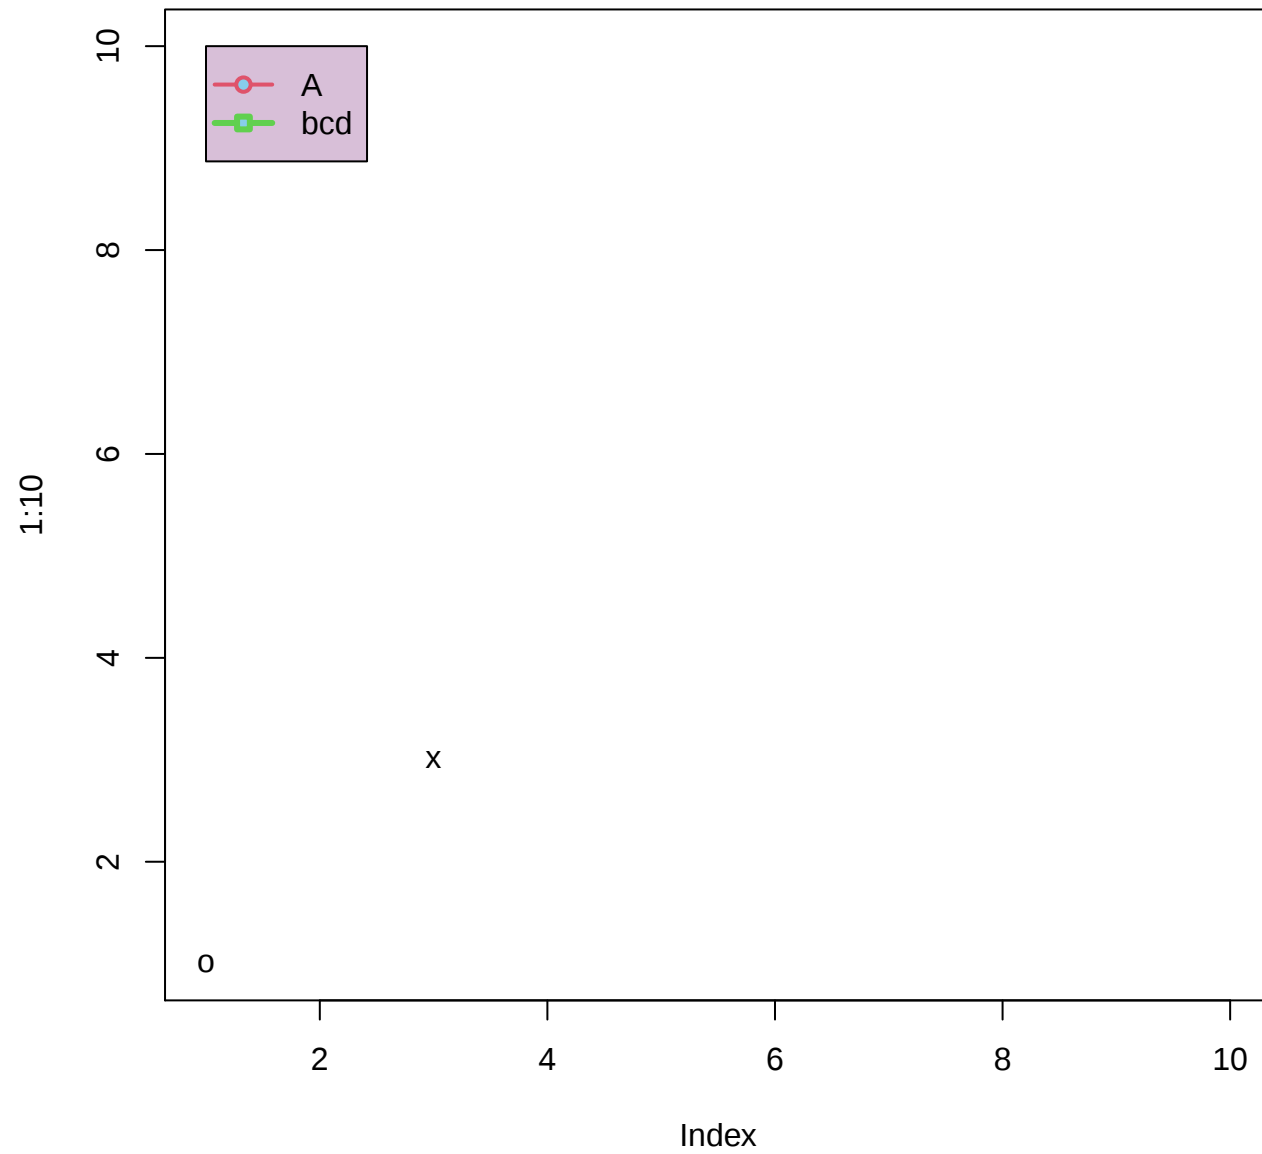


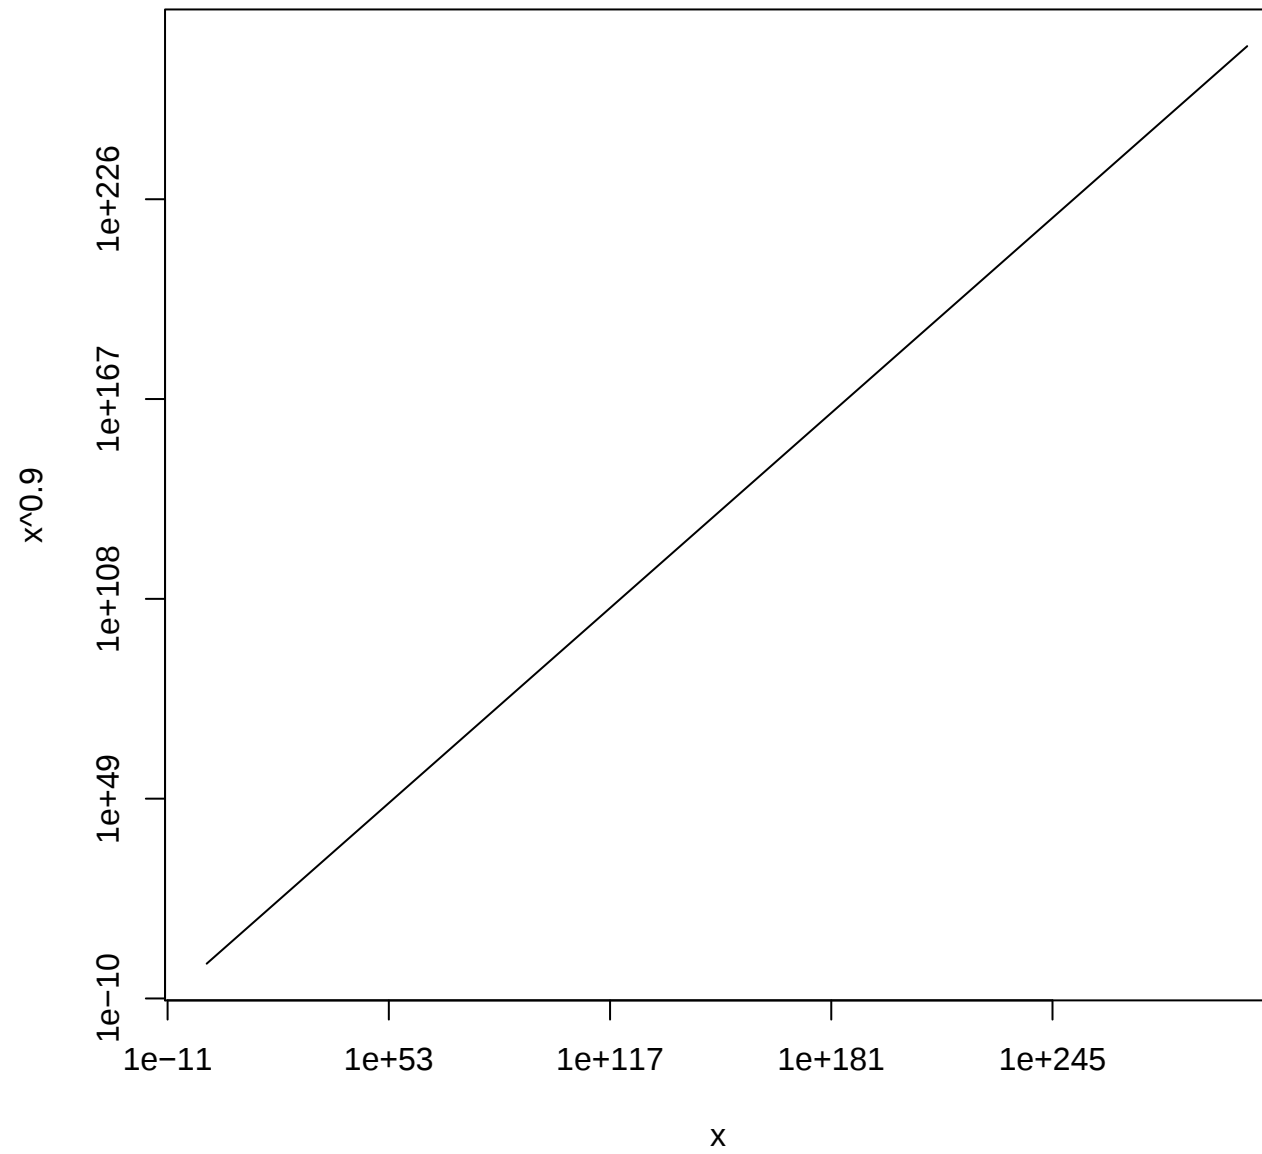

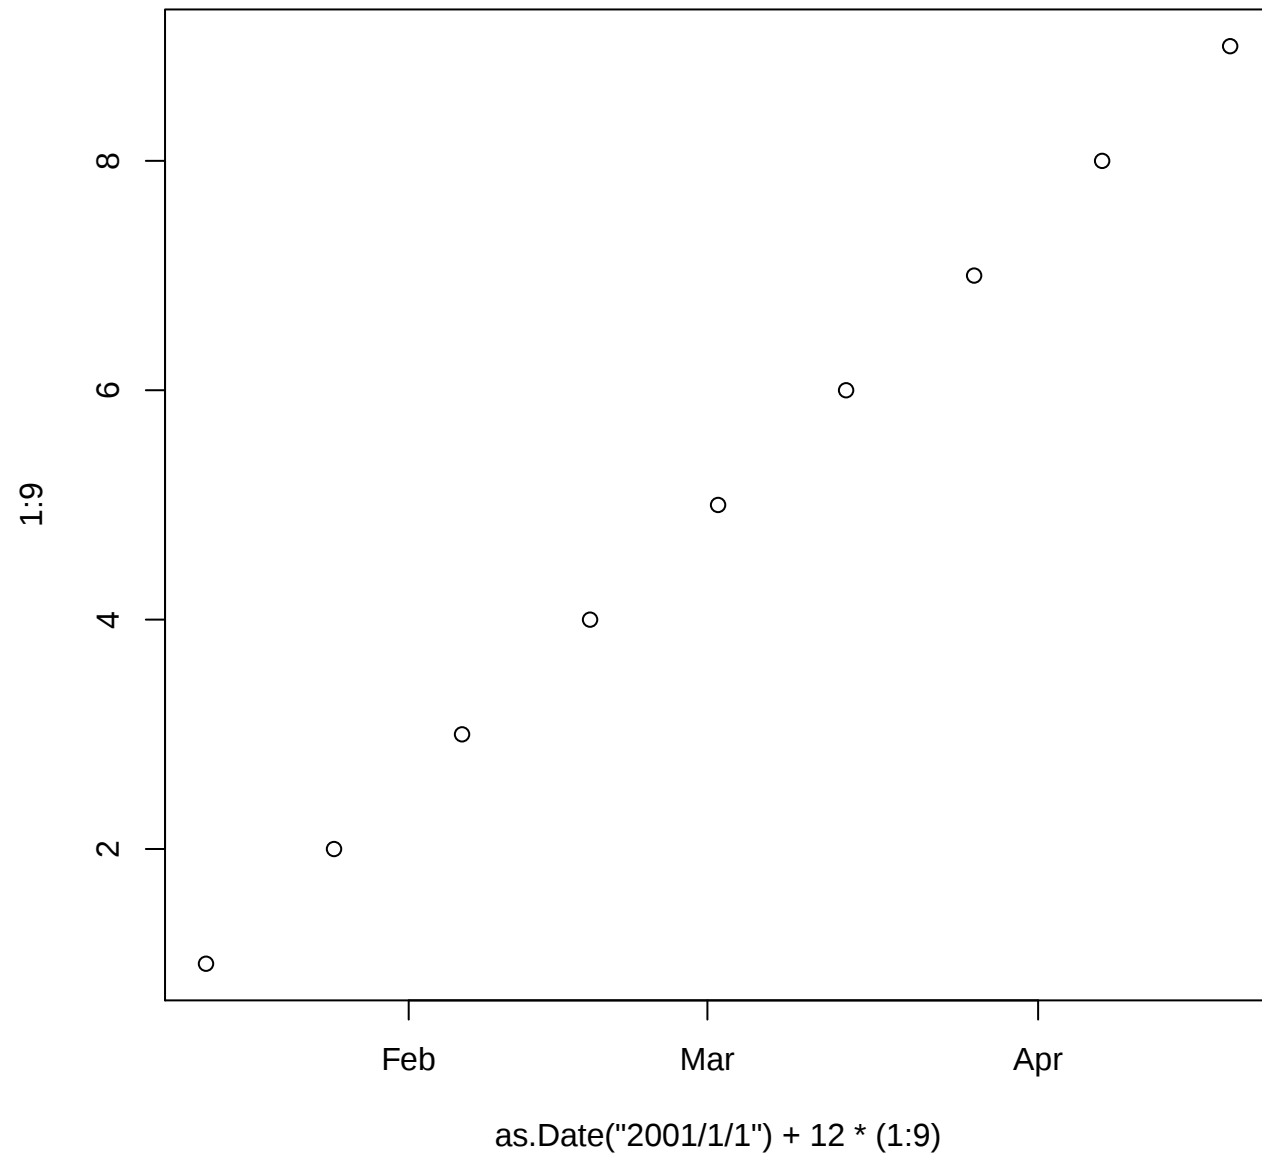

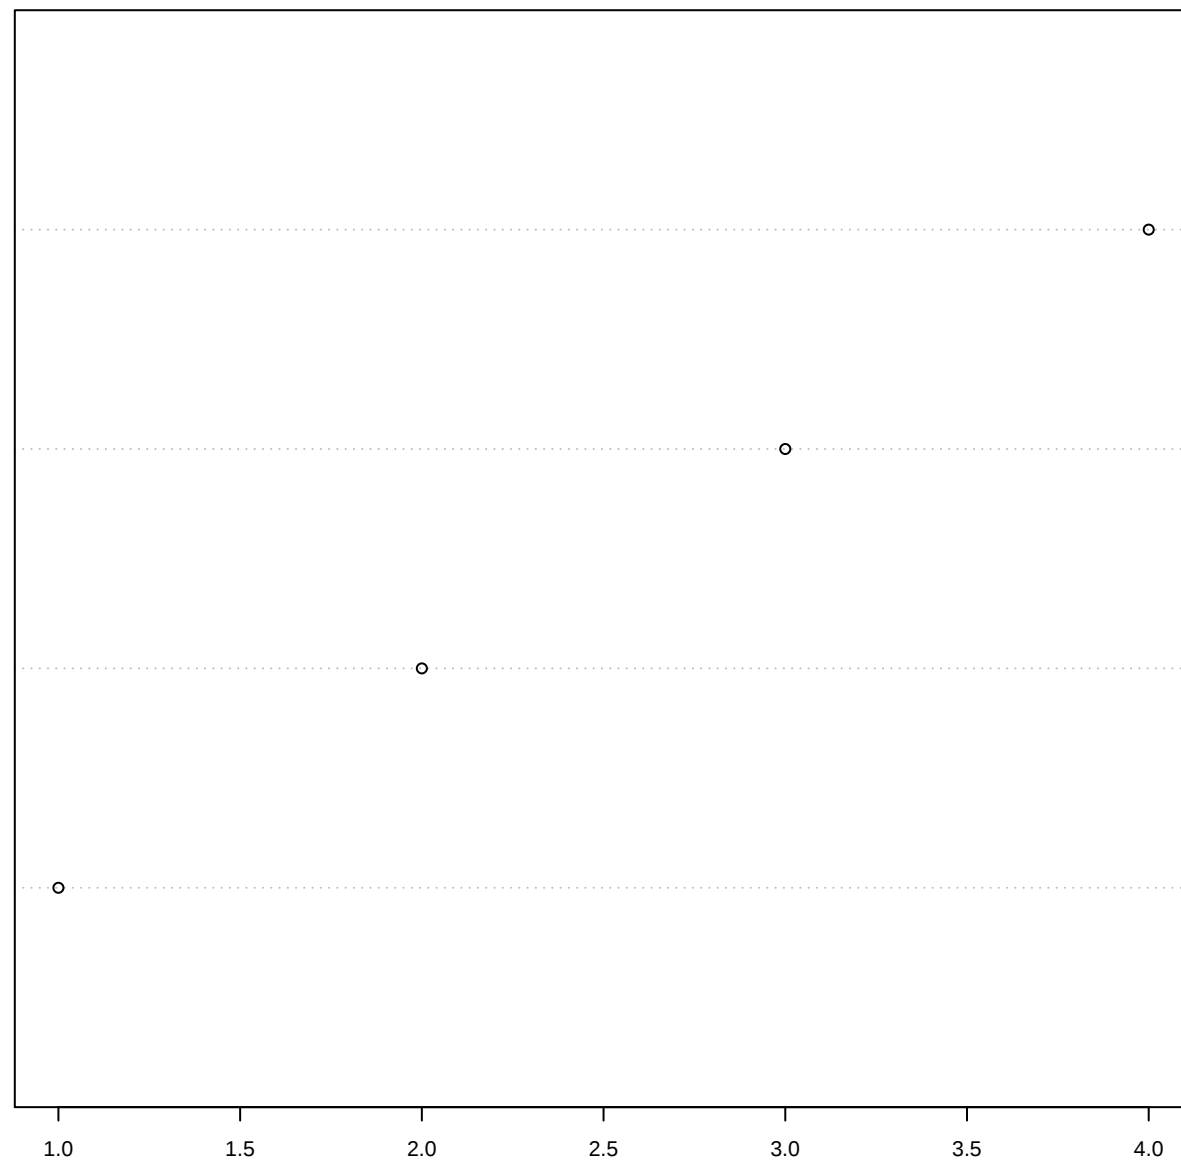


cos

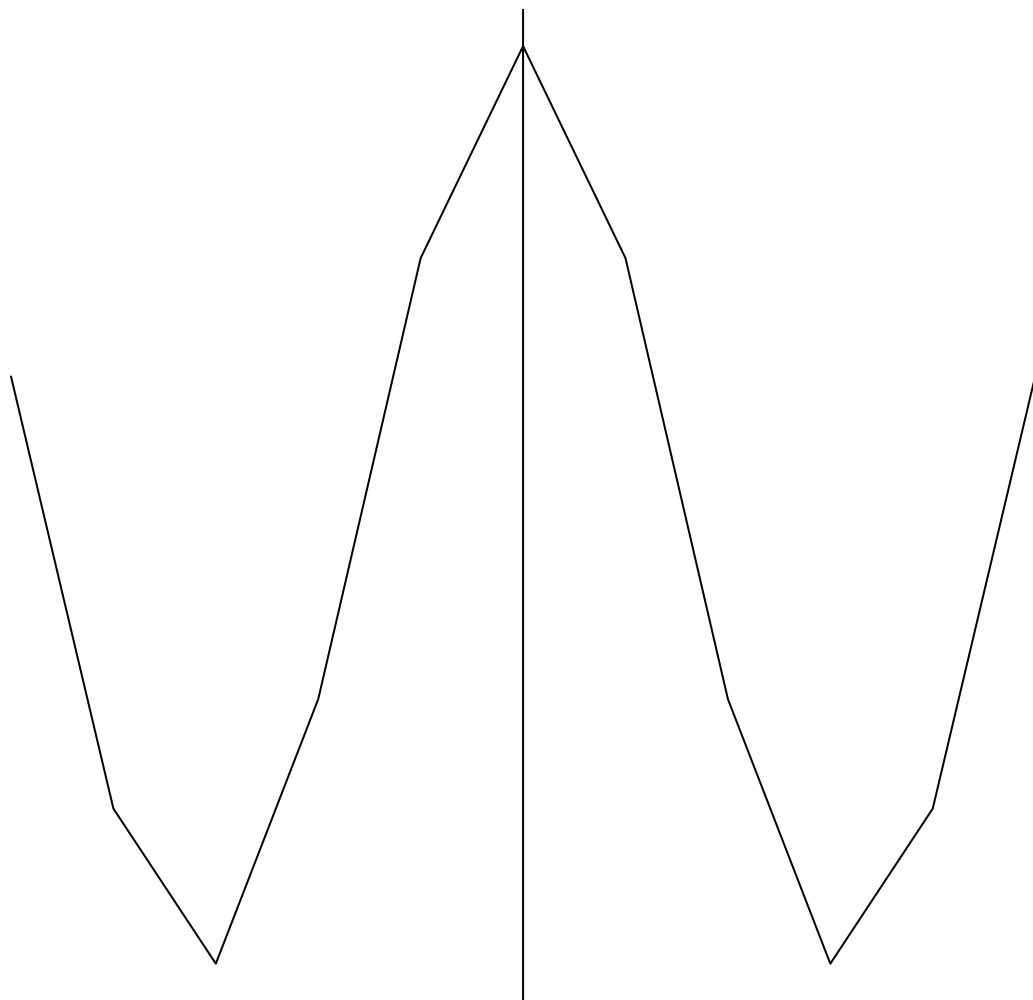


x

sin

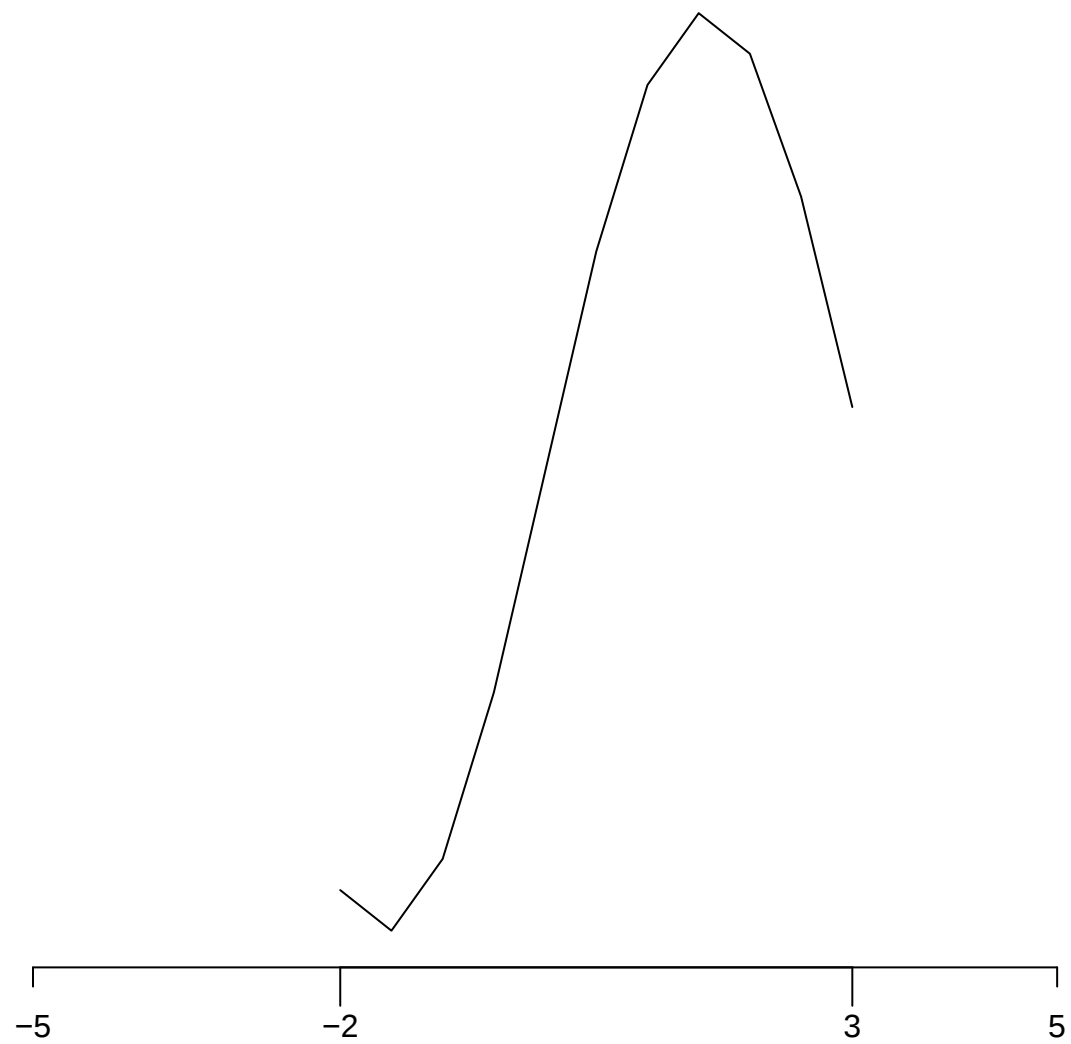


cos


x

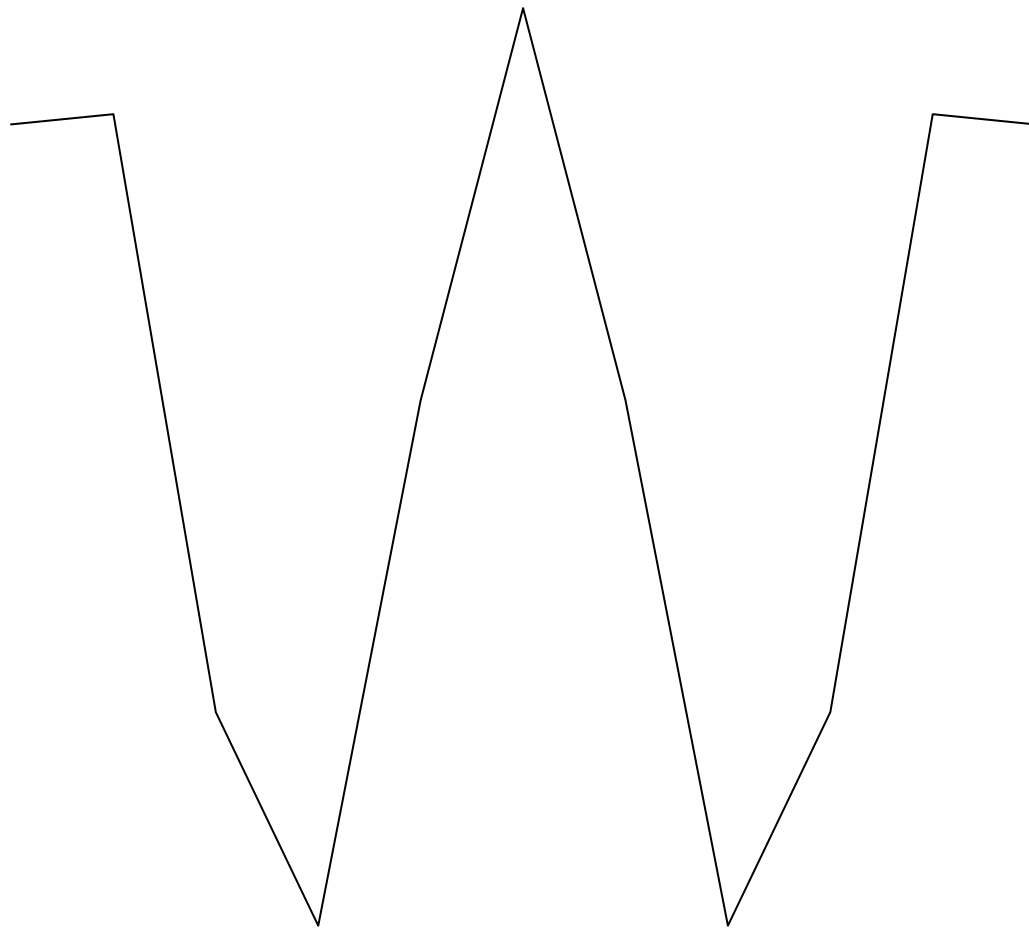

Cosine $\cos(x)$

x

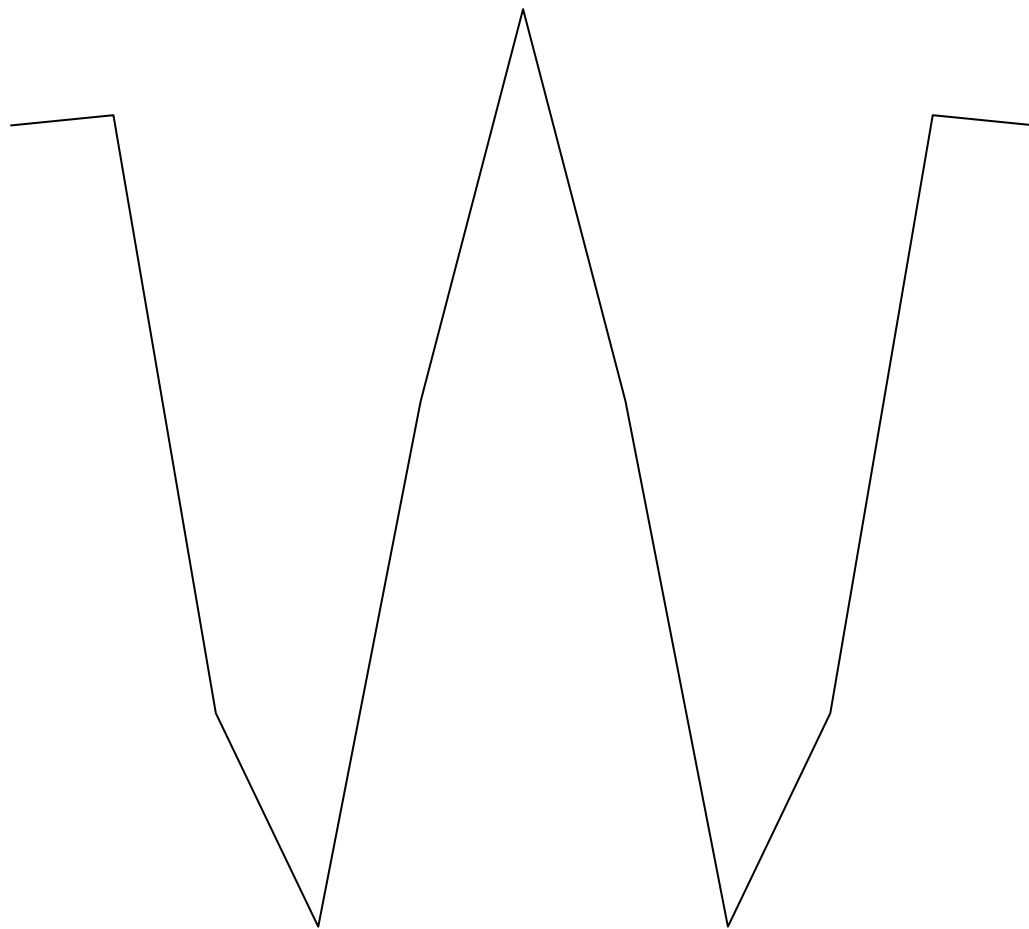

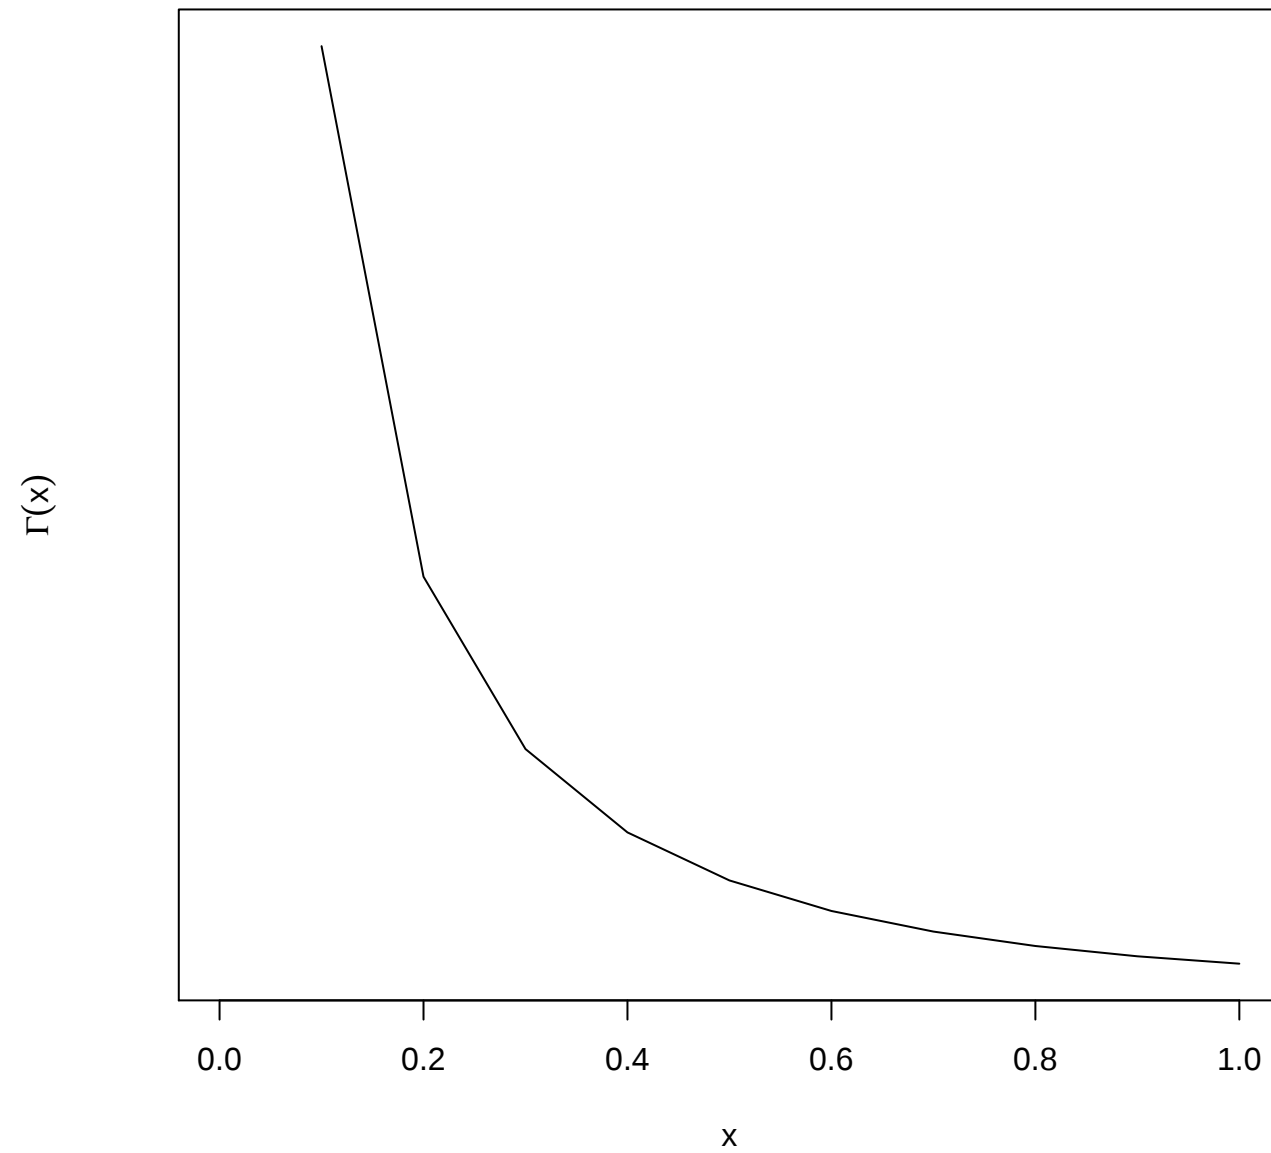


x

1


2

3


x1

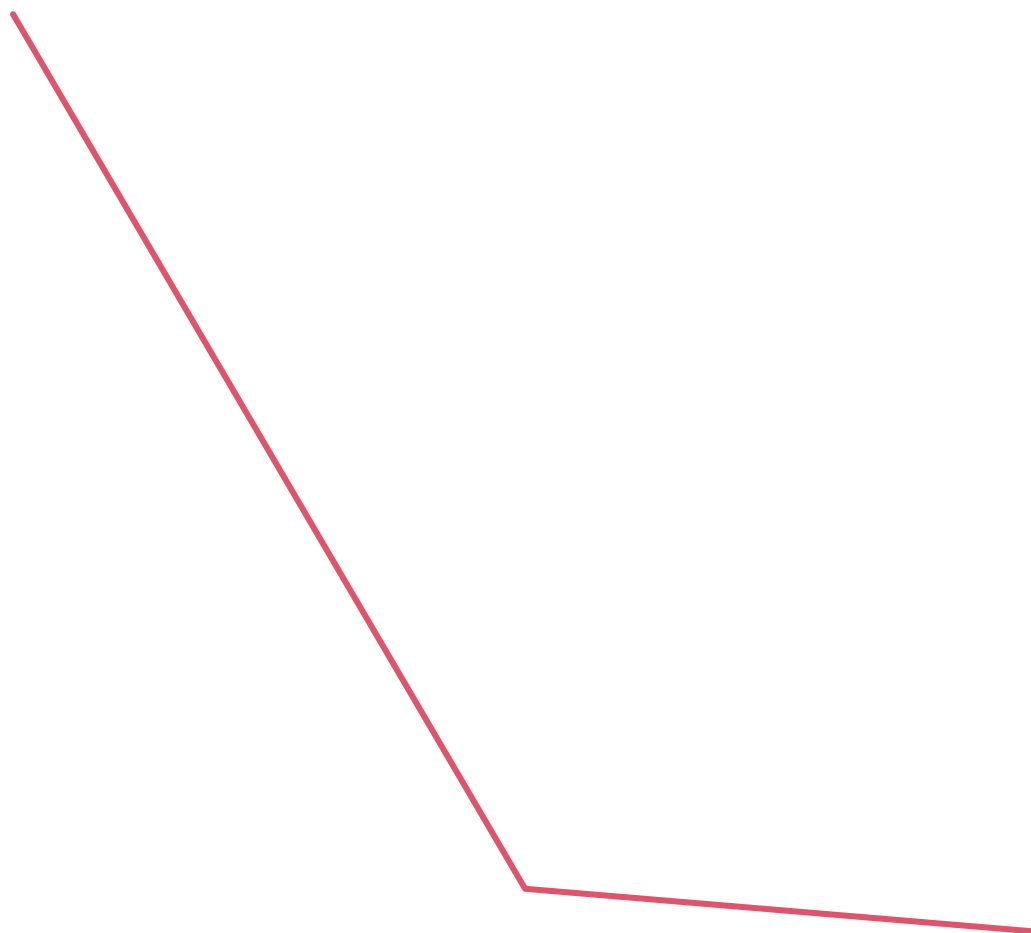



x

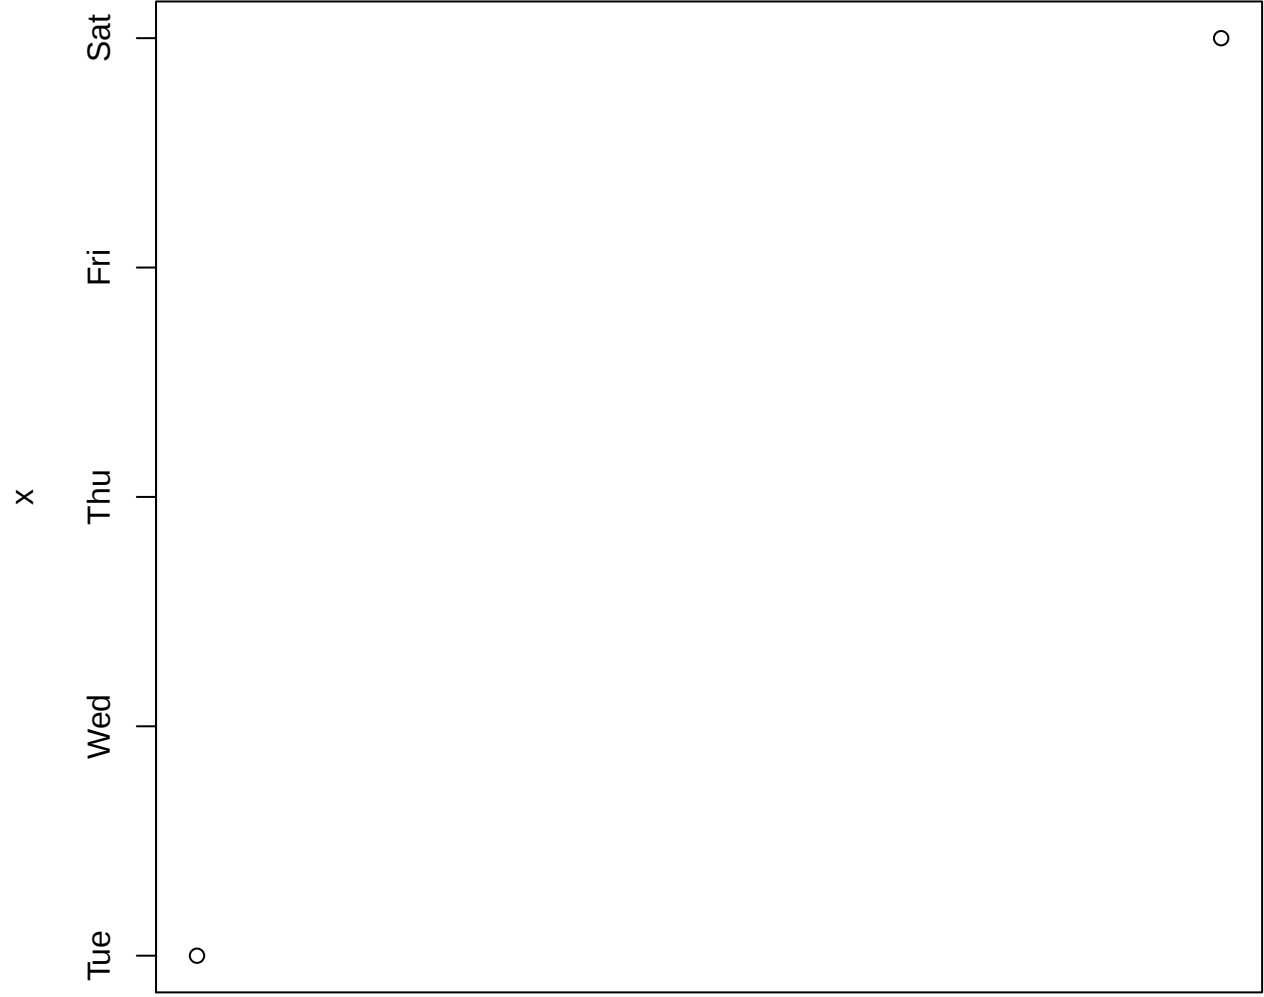



Index


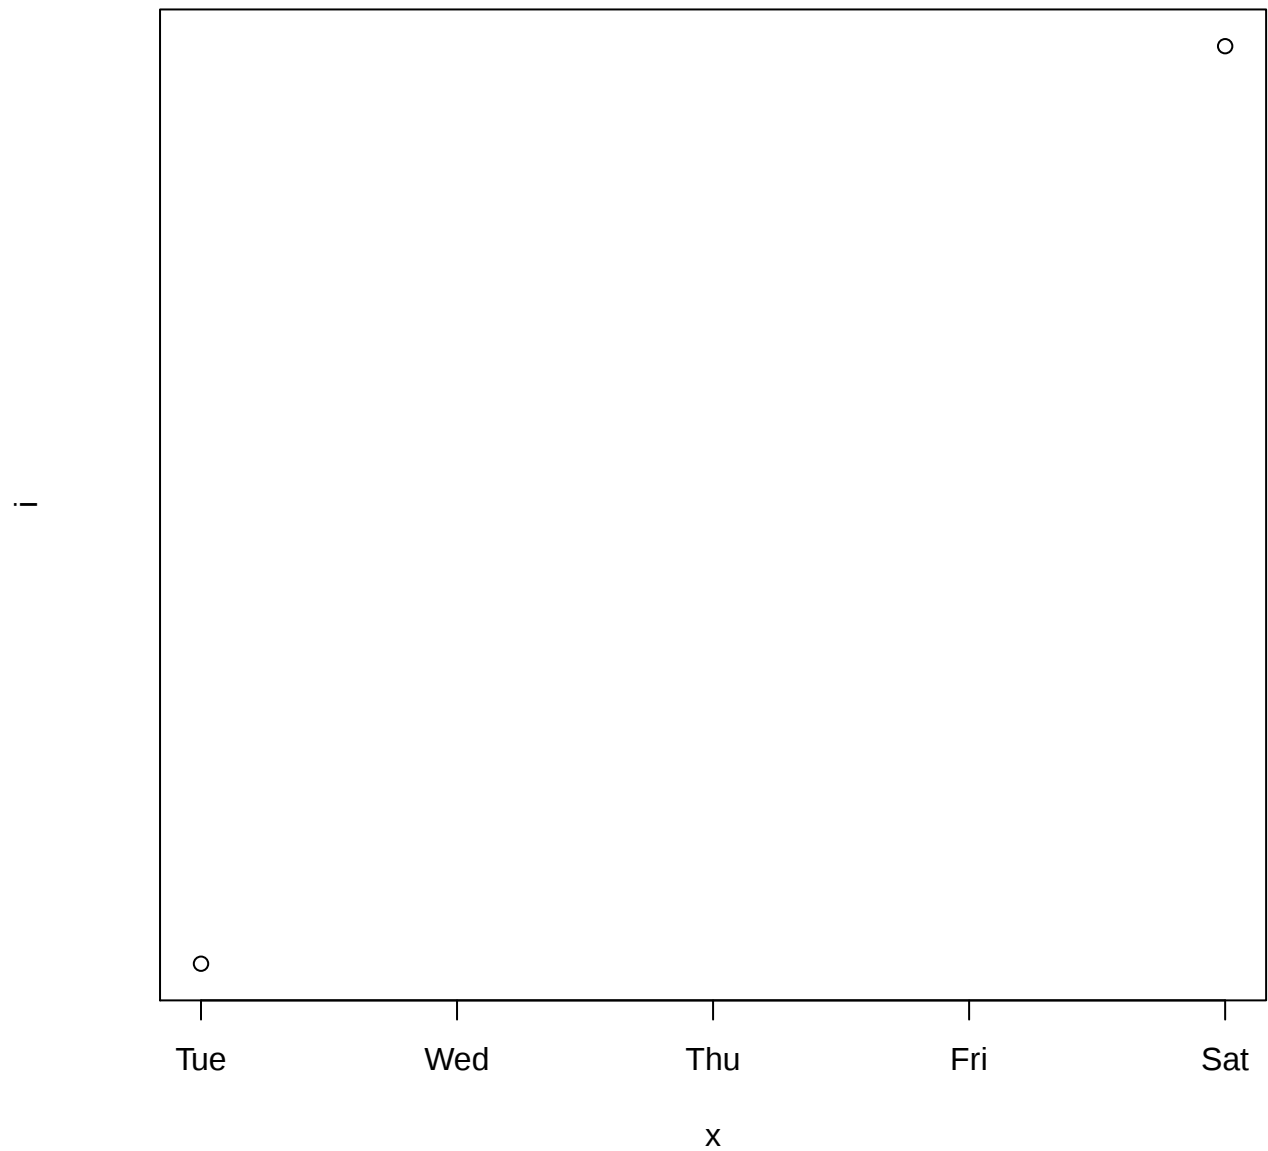



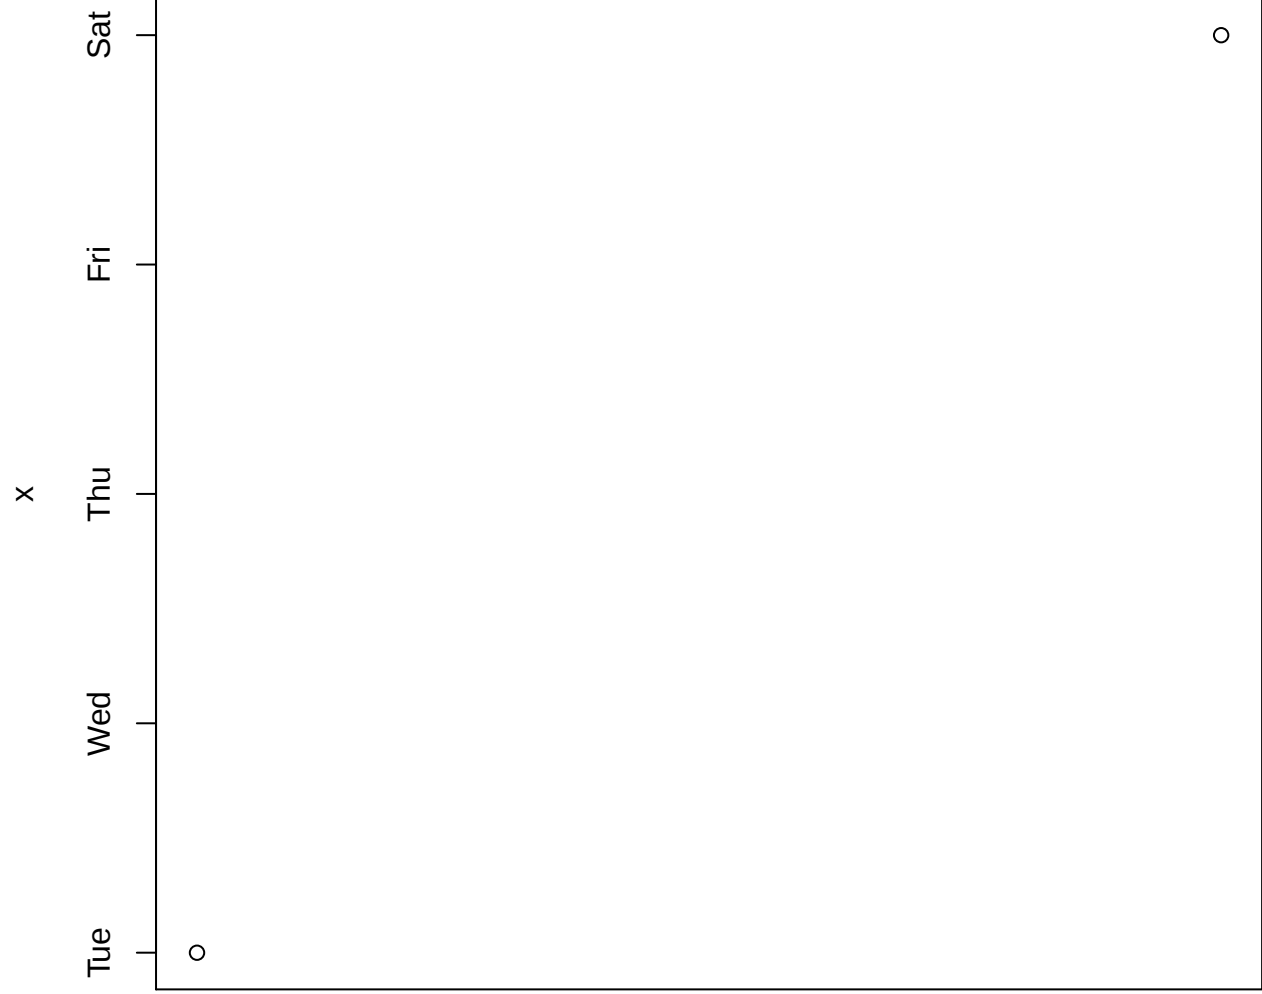



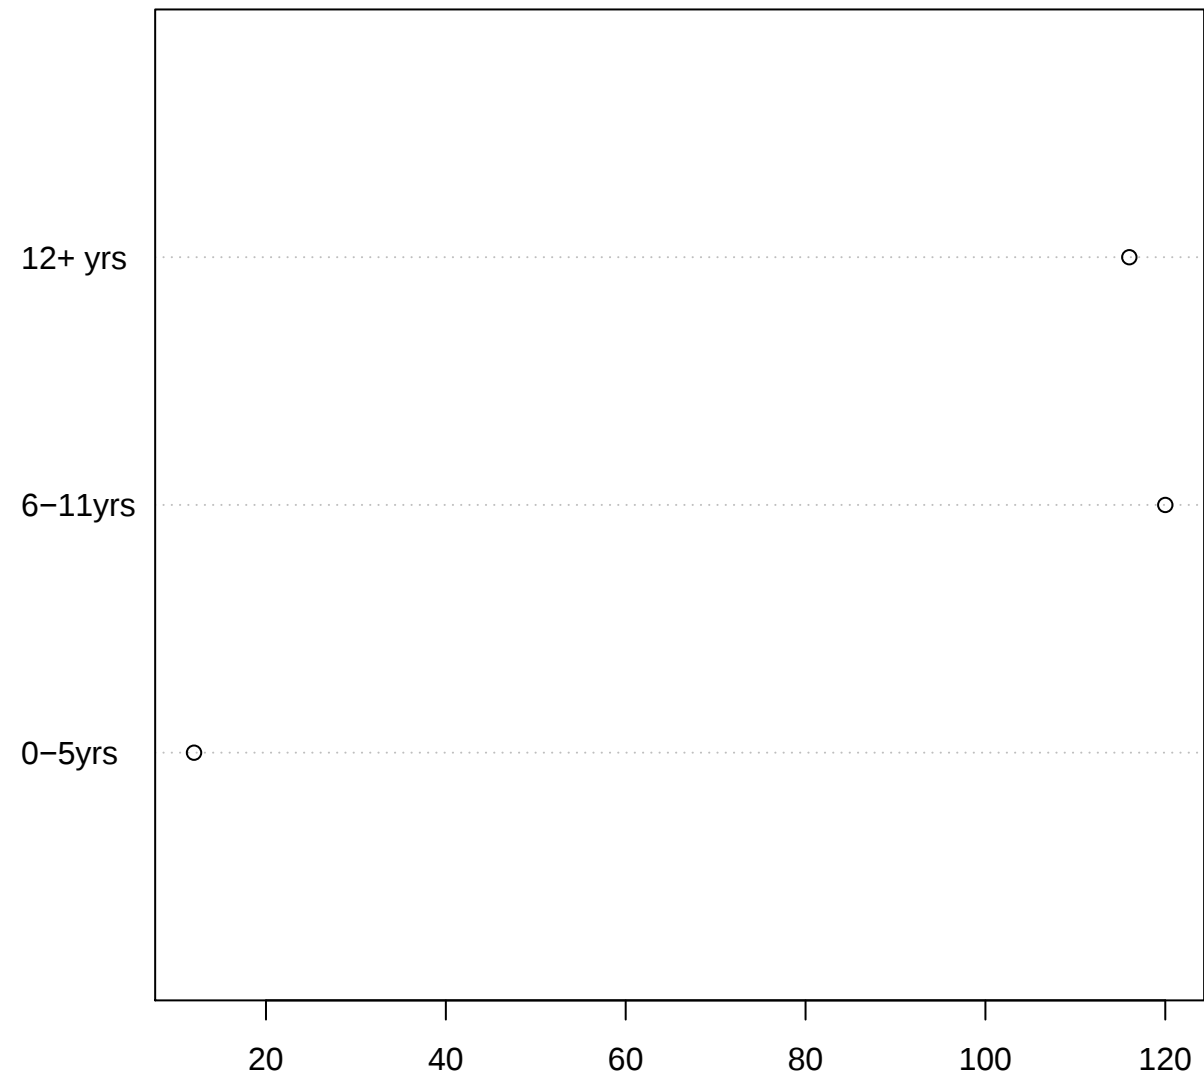


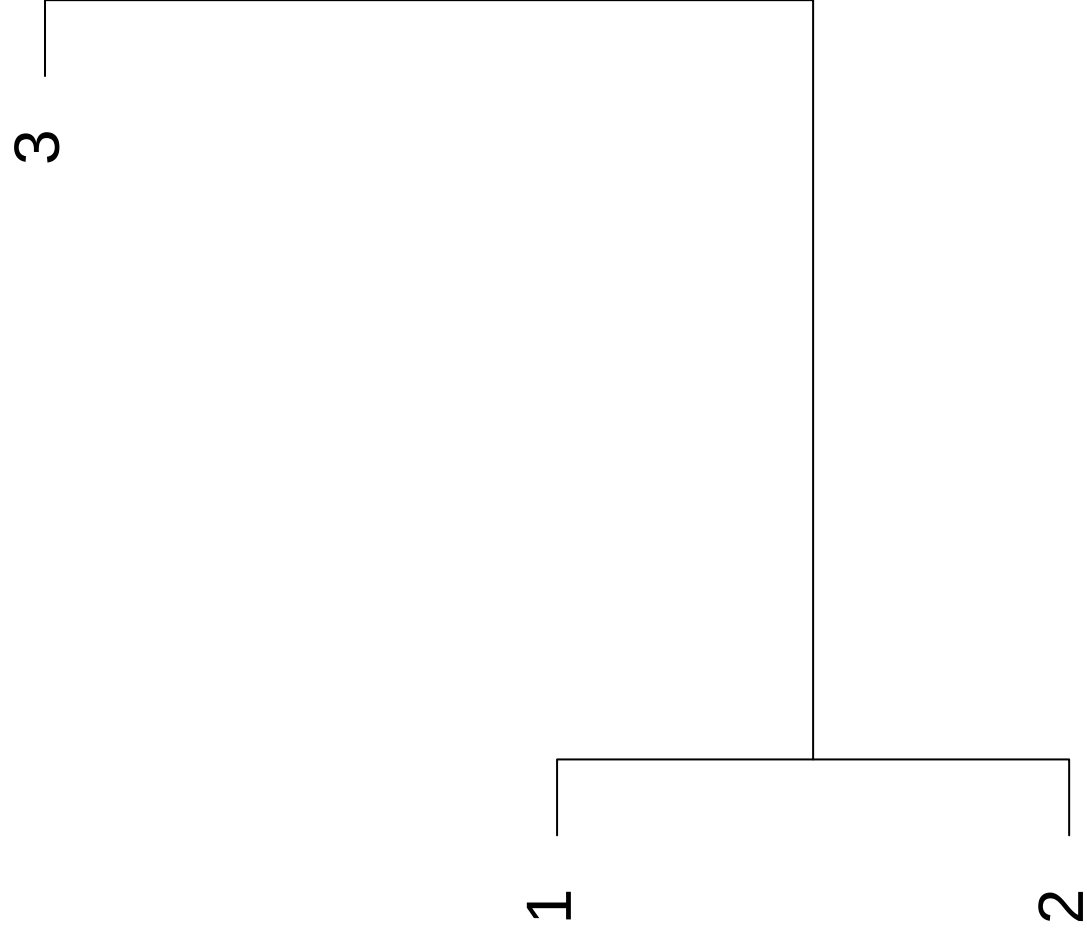


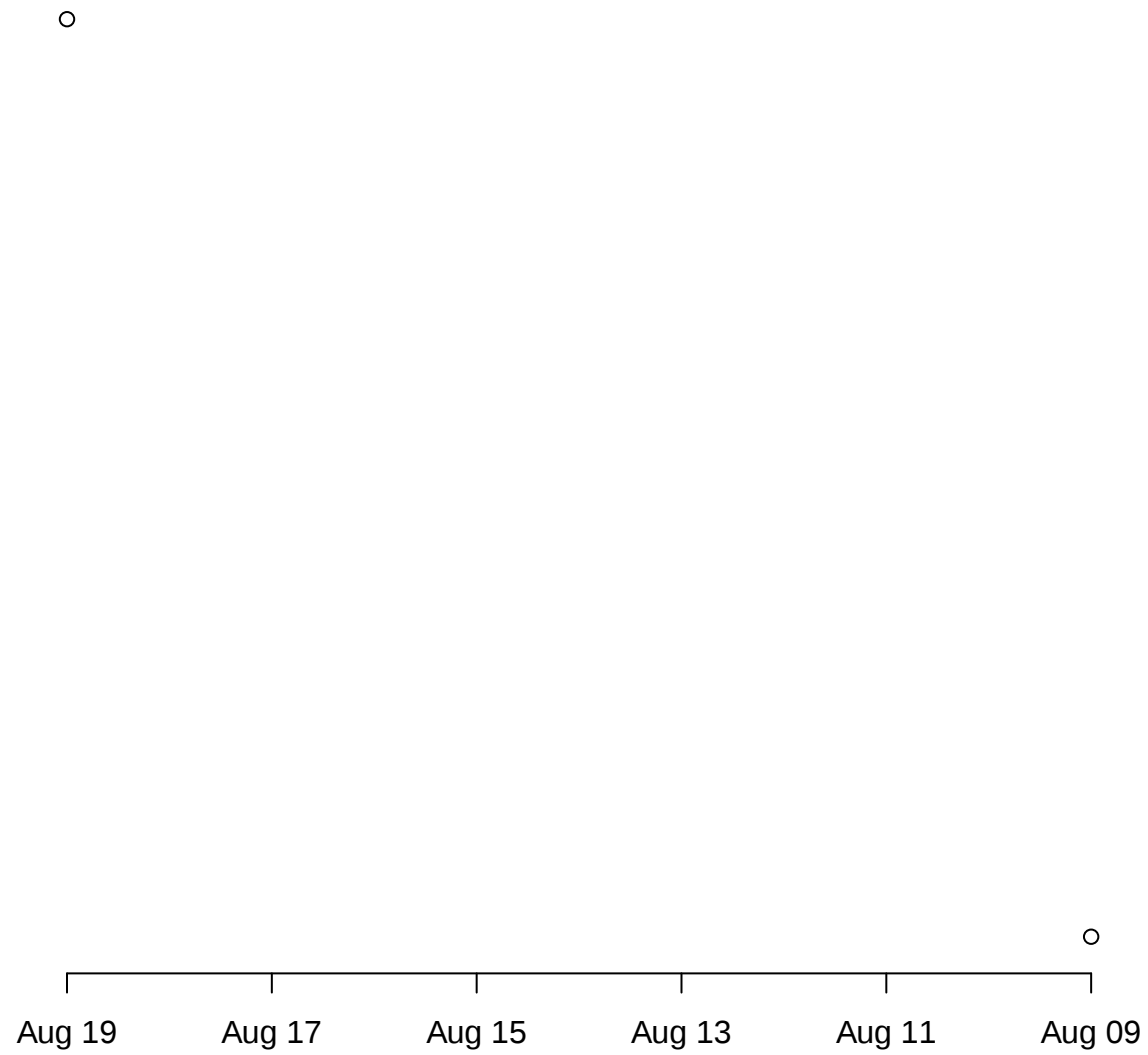

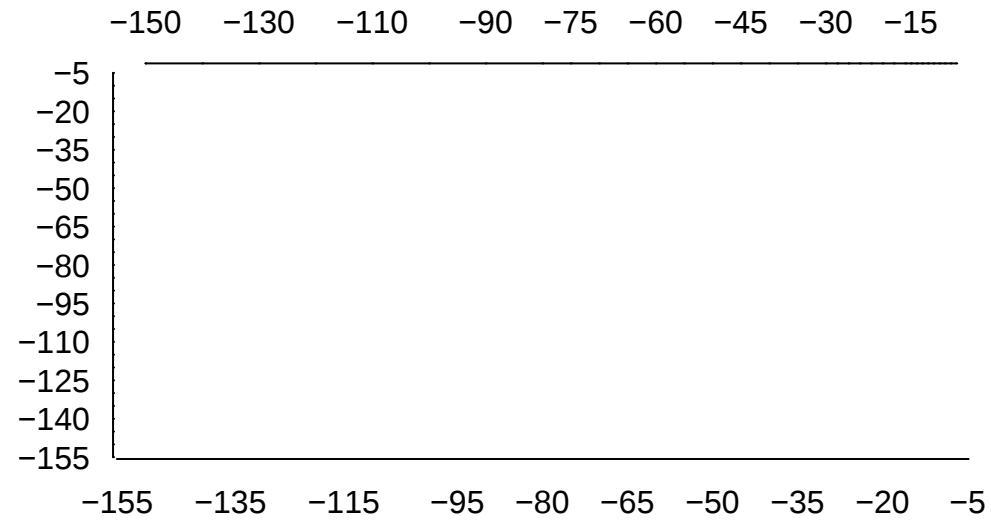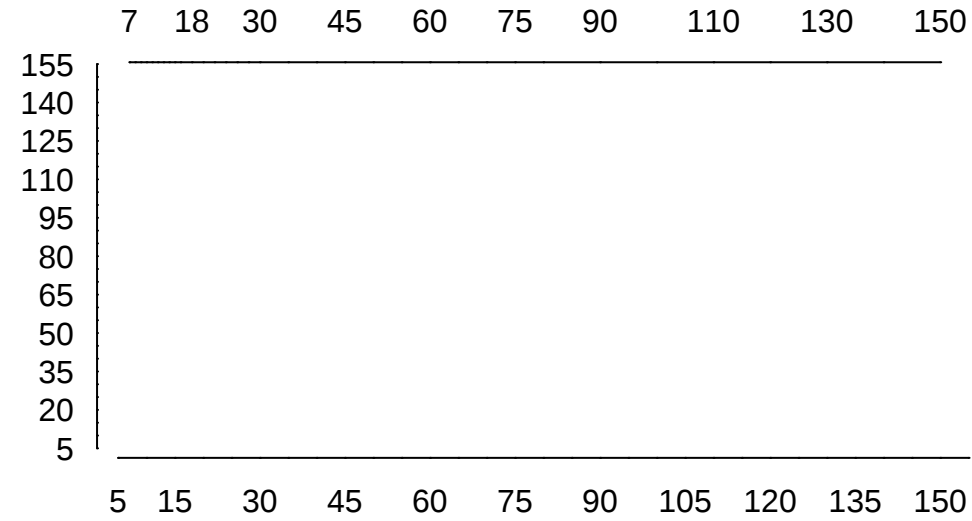


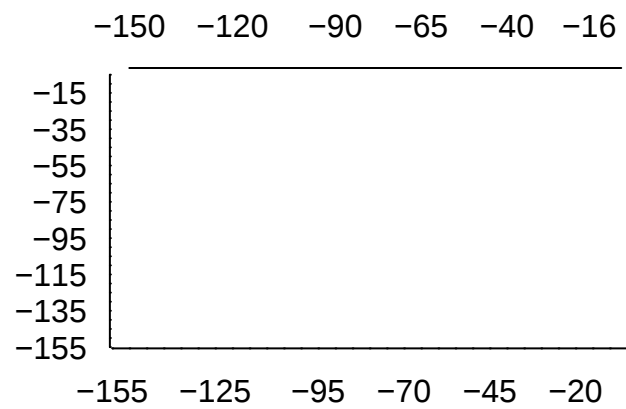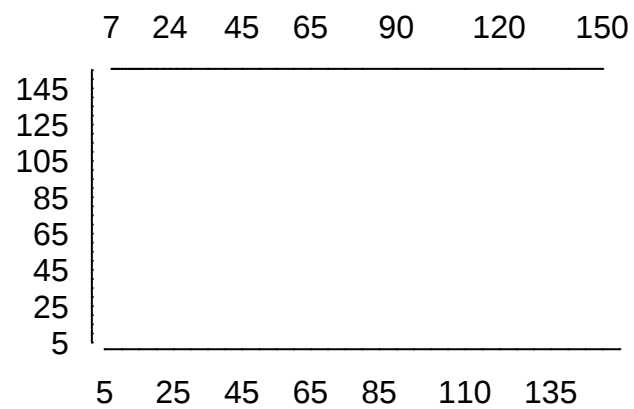




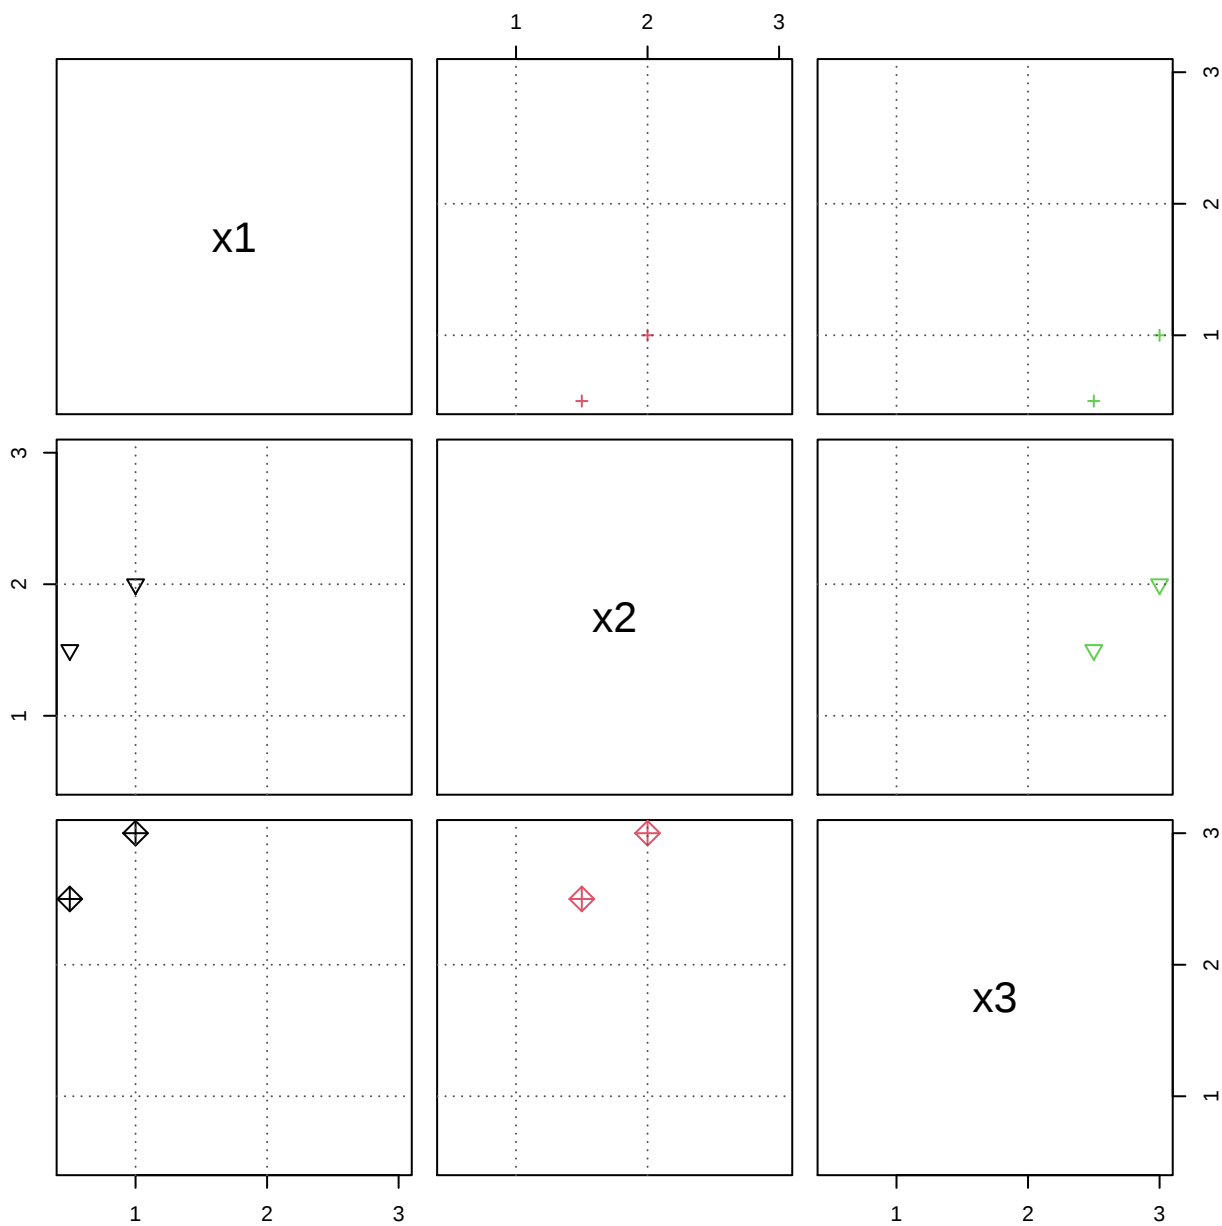


(horInd = 1:2, verInd = 1:3)

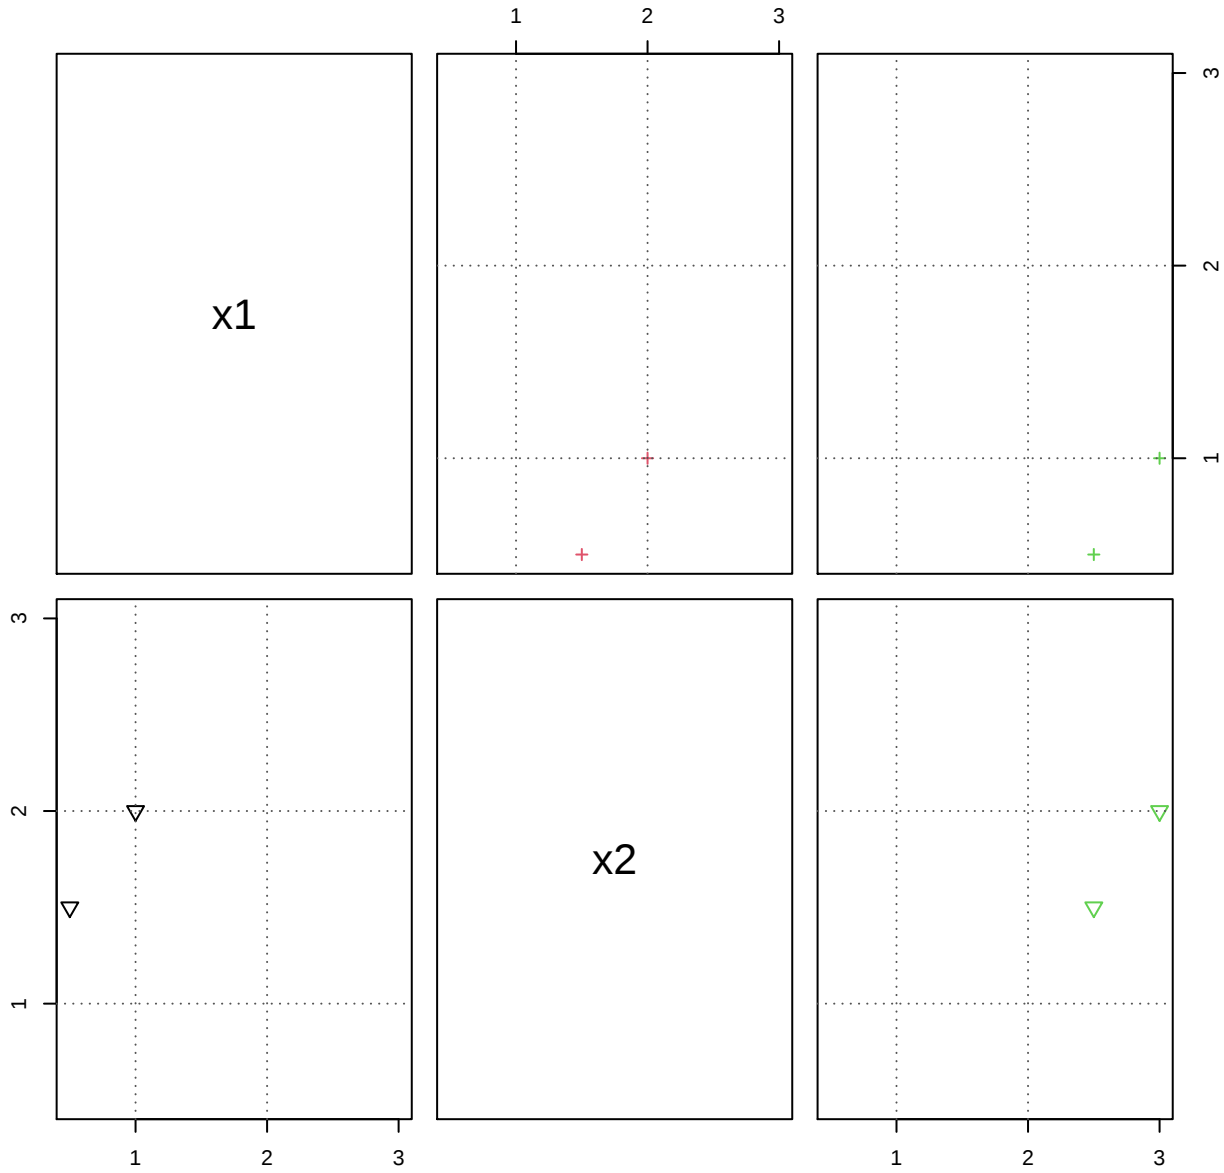


(horInd = 3:2)

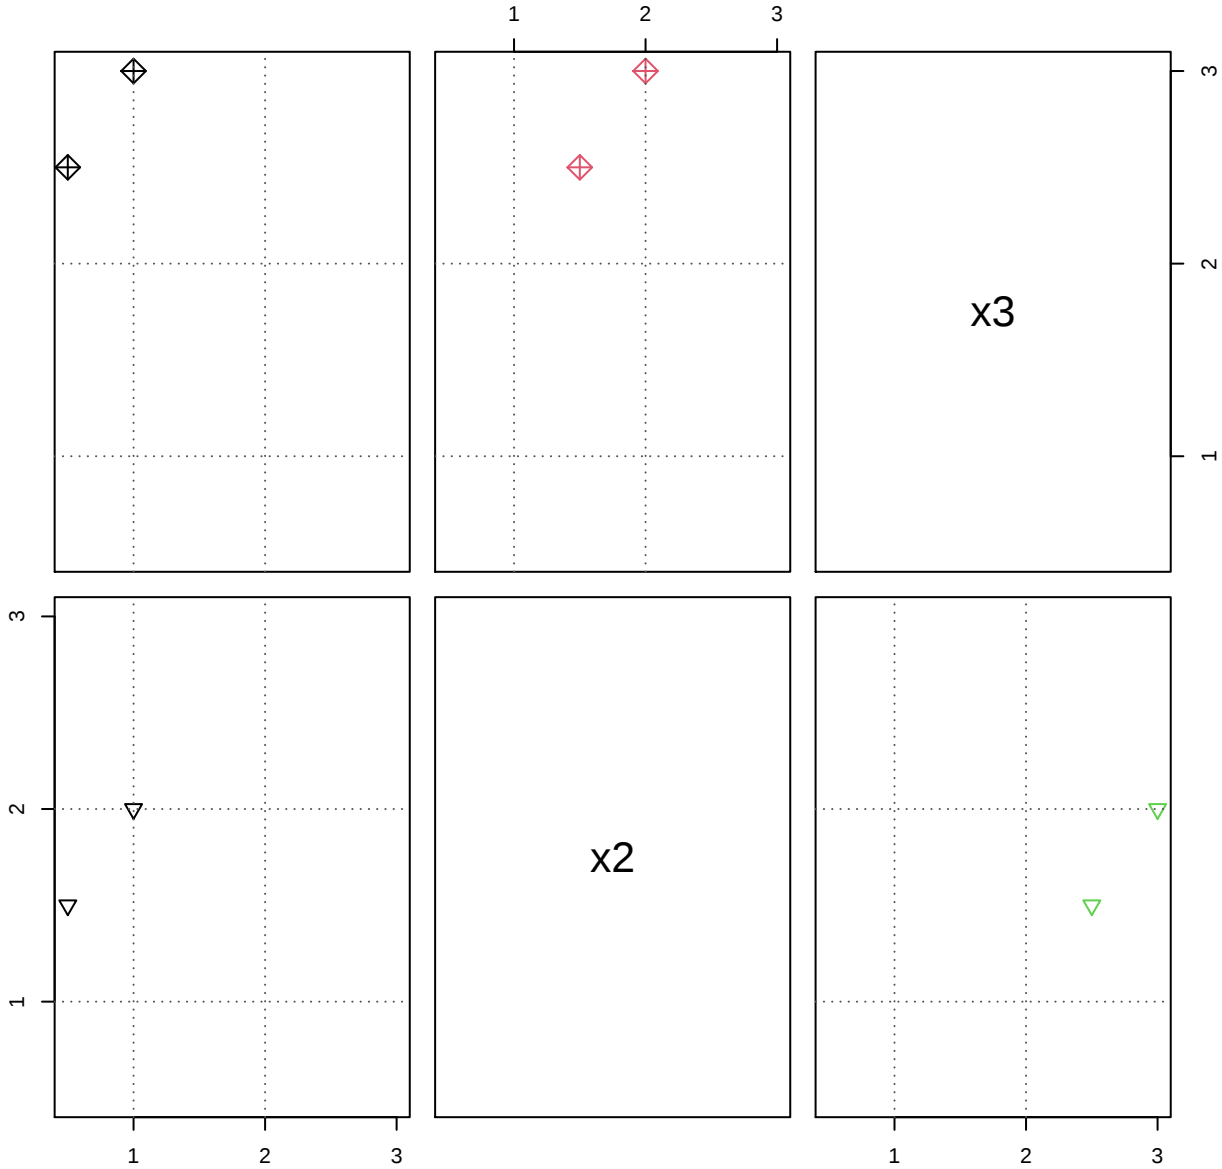


(verlnd = c(3, 1))

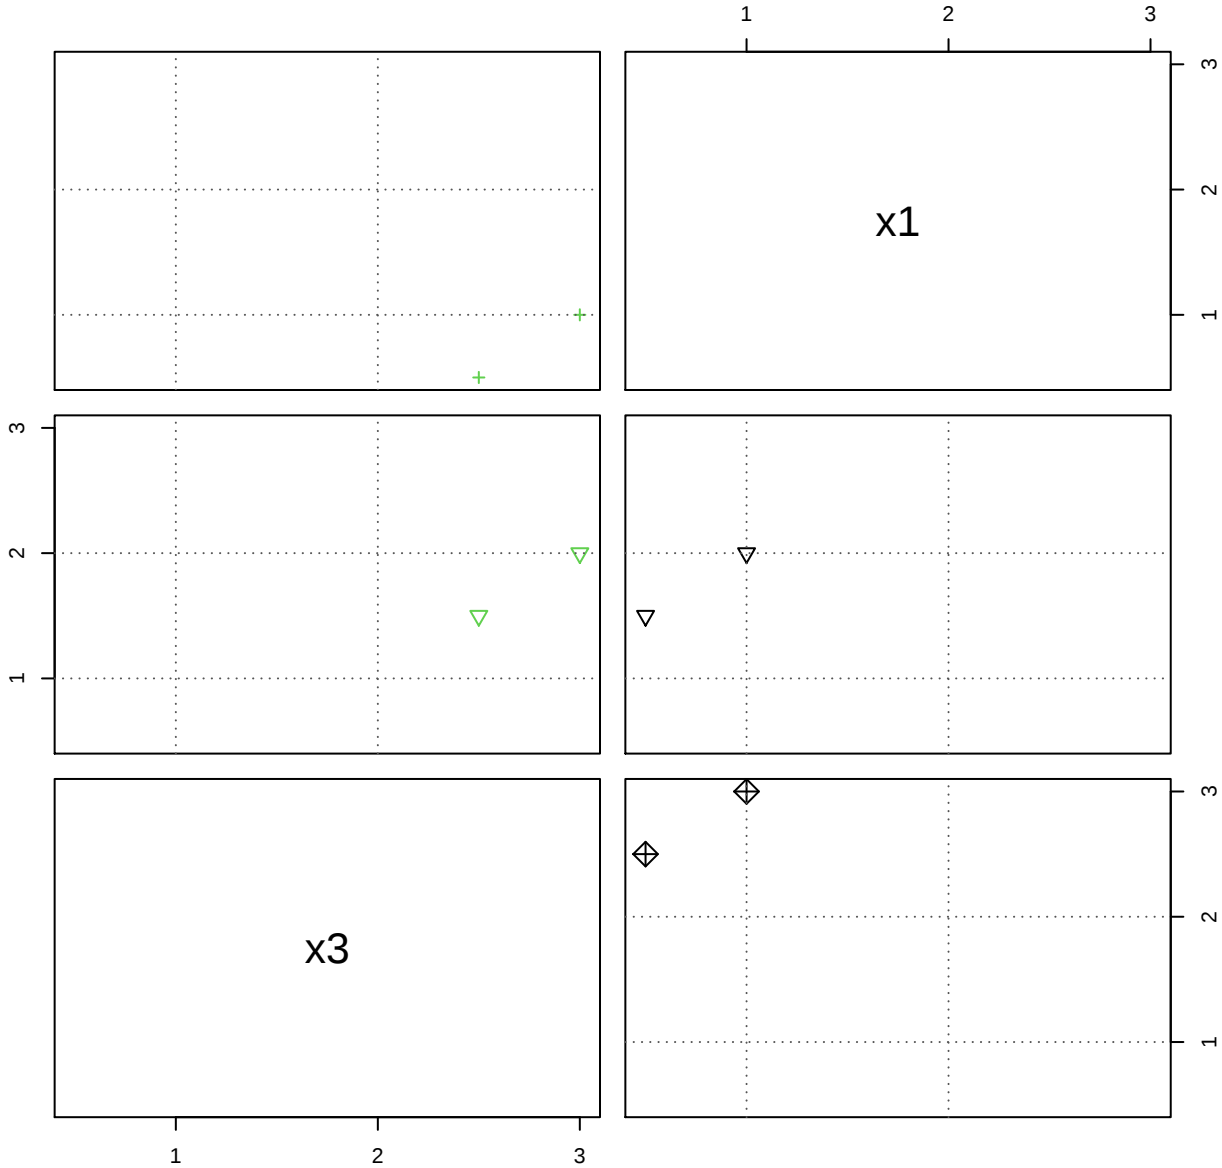


(row1atop = FALSE)

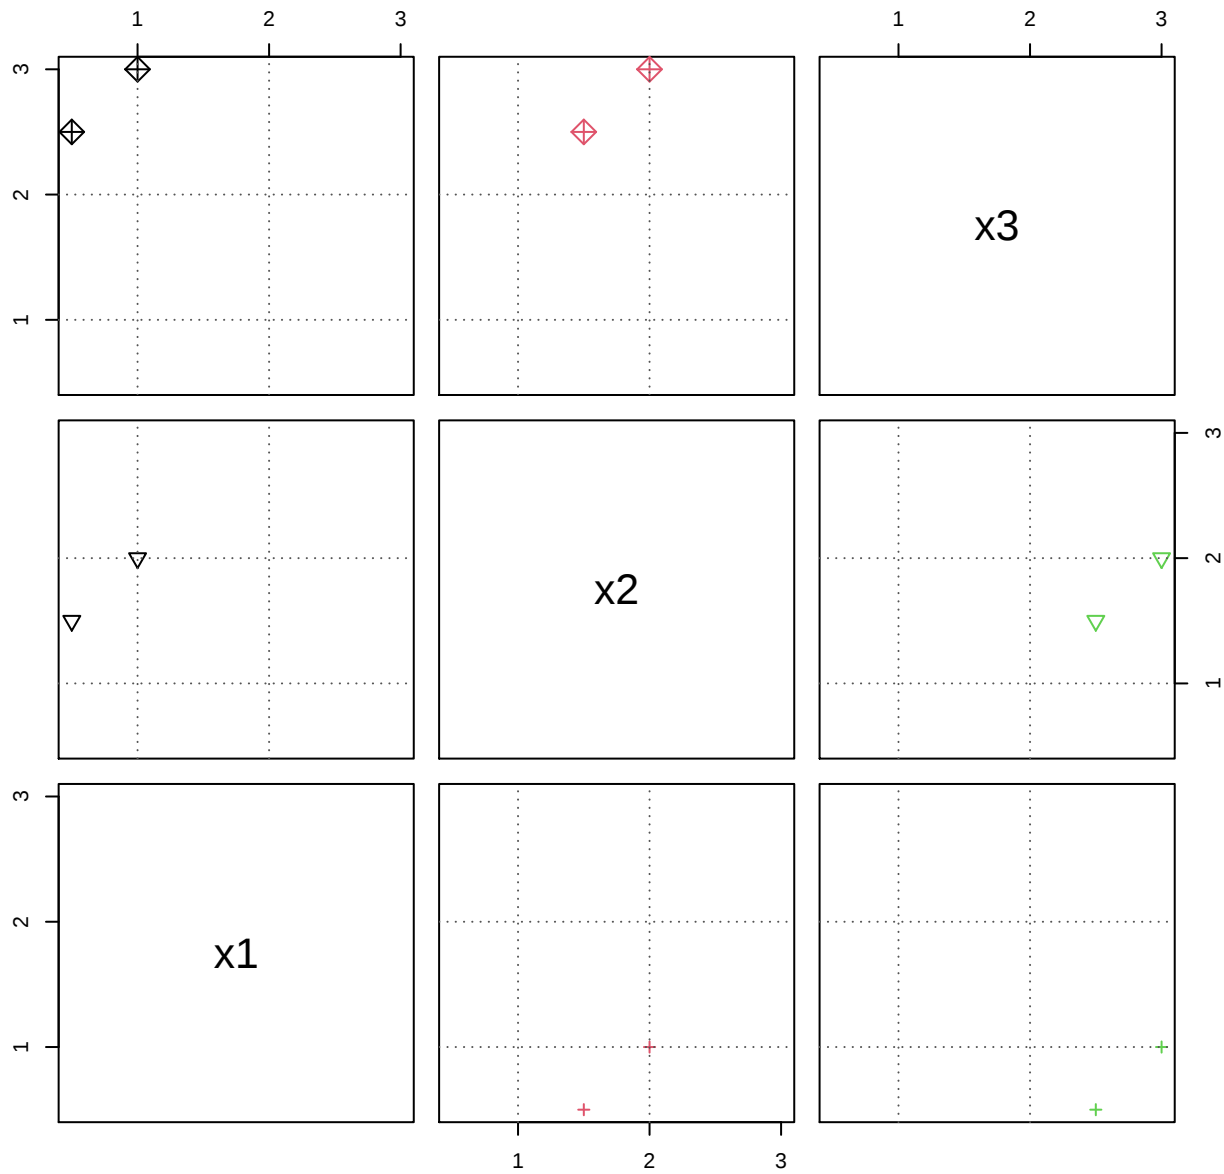


(horInd = 2:1, verInd = 3:1, row1atop = FALSE)

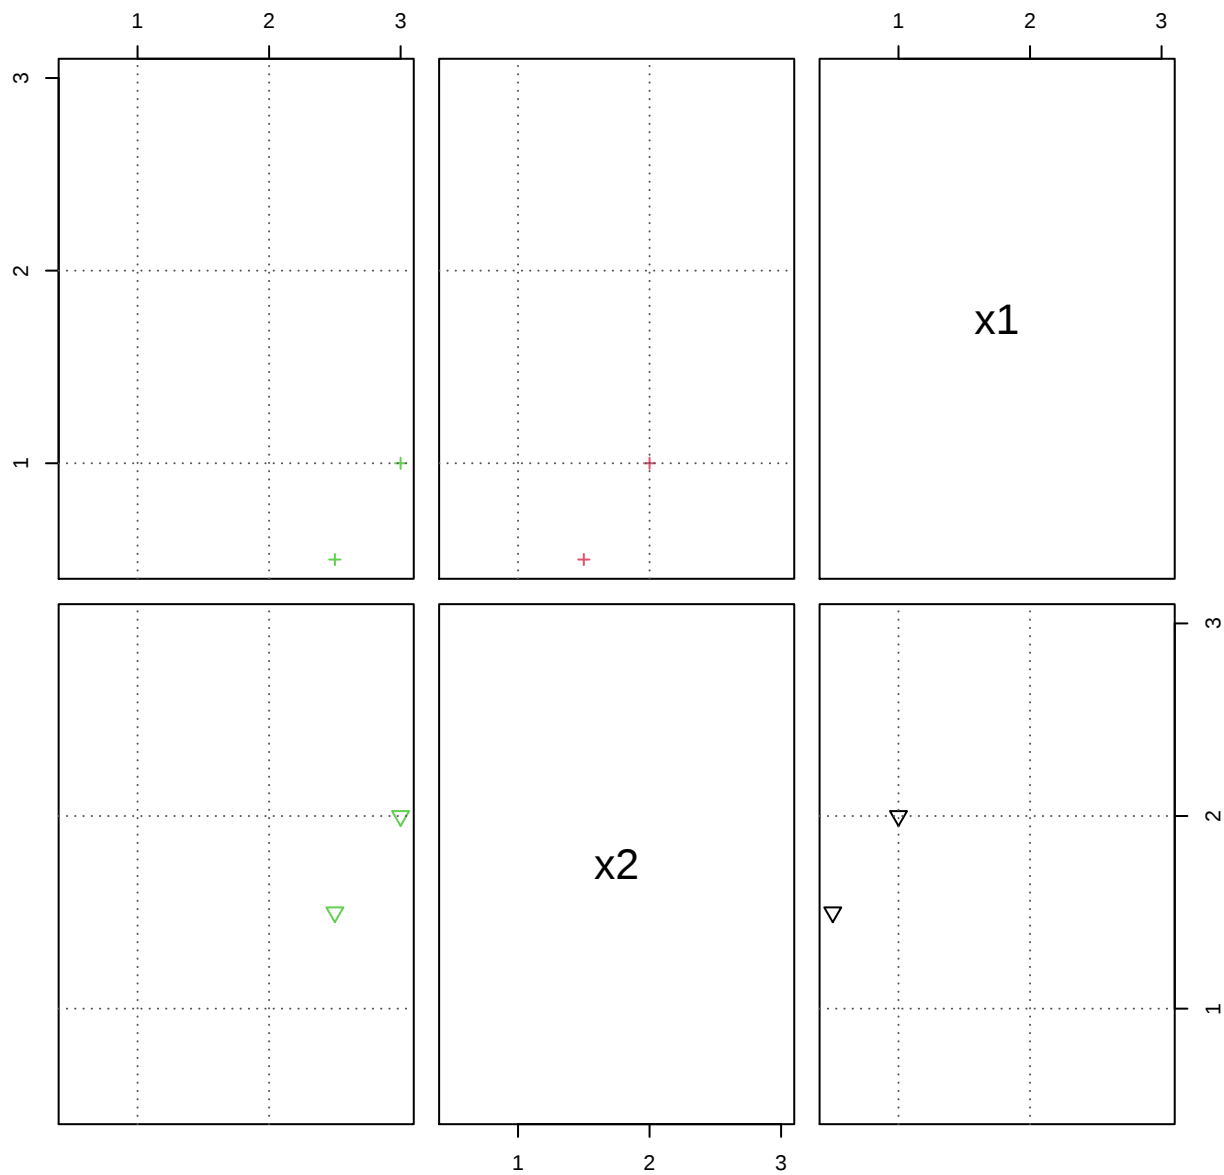



(horInd = c(3, 1), row1atop = FALSE)

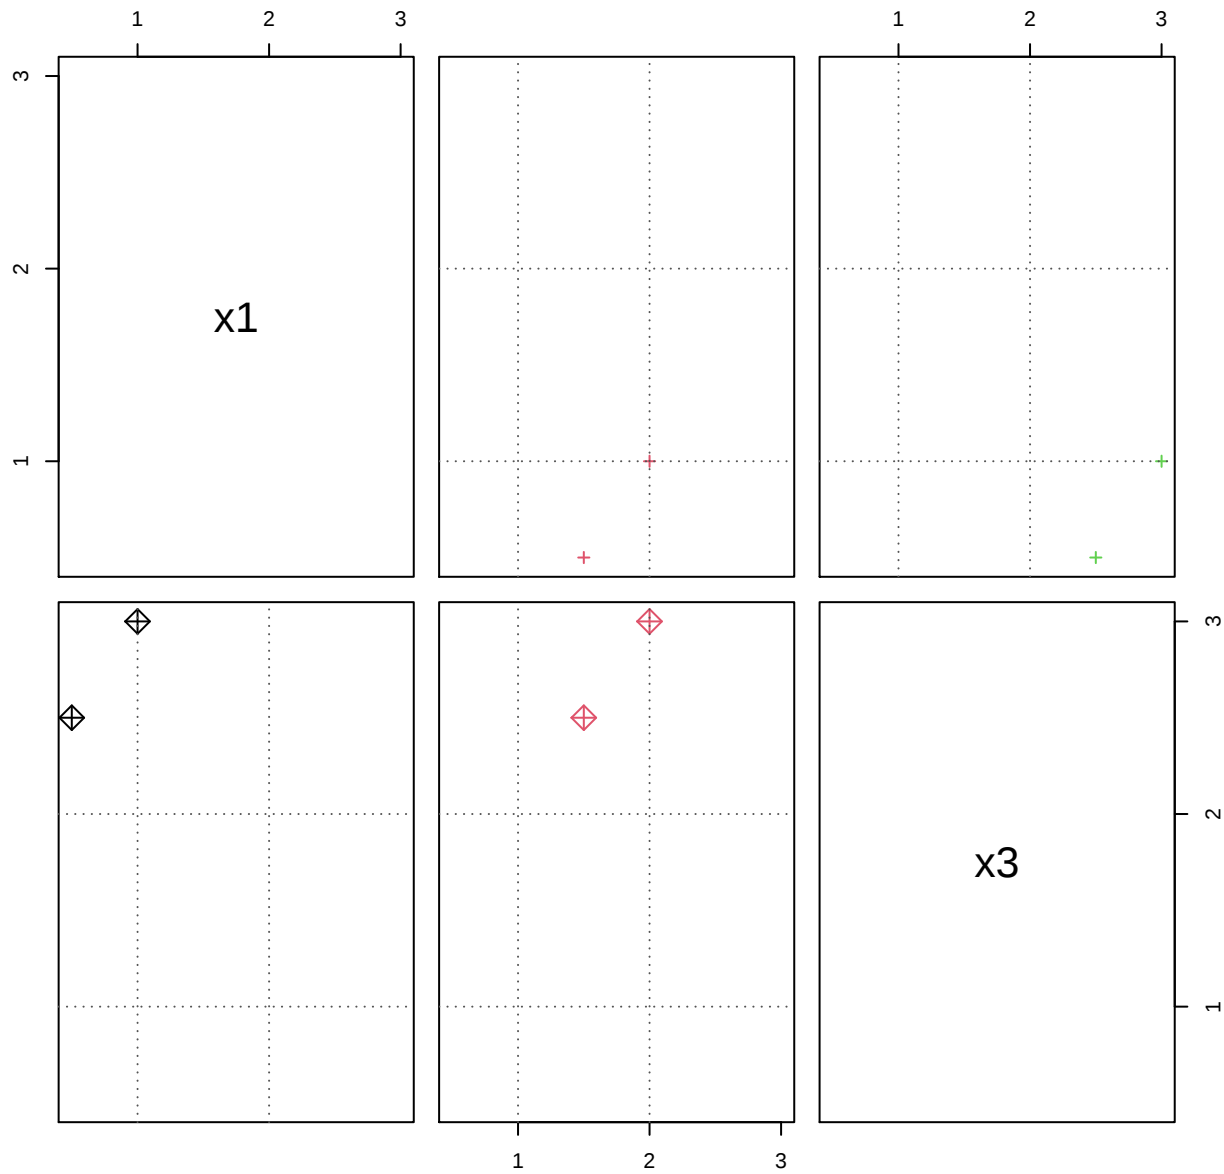

(verInd = c(3, 2), row1atop = FALSE)

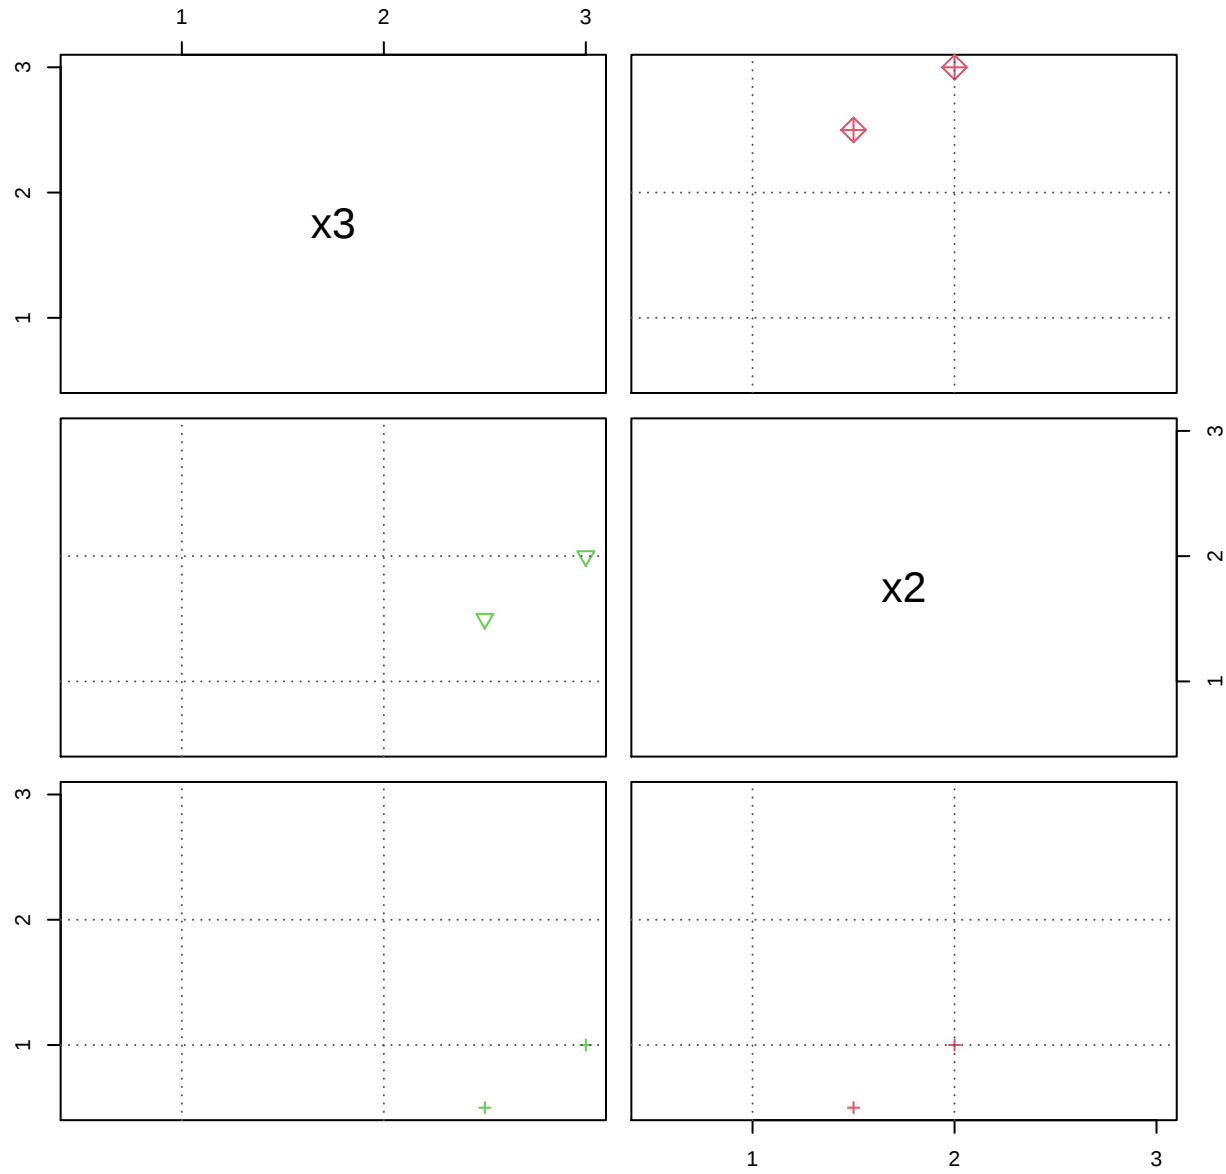

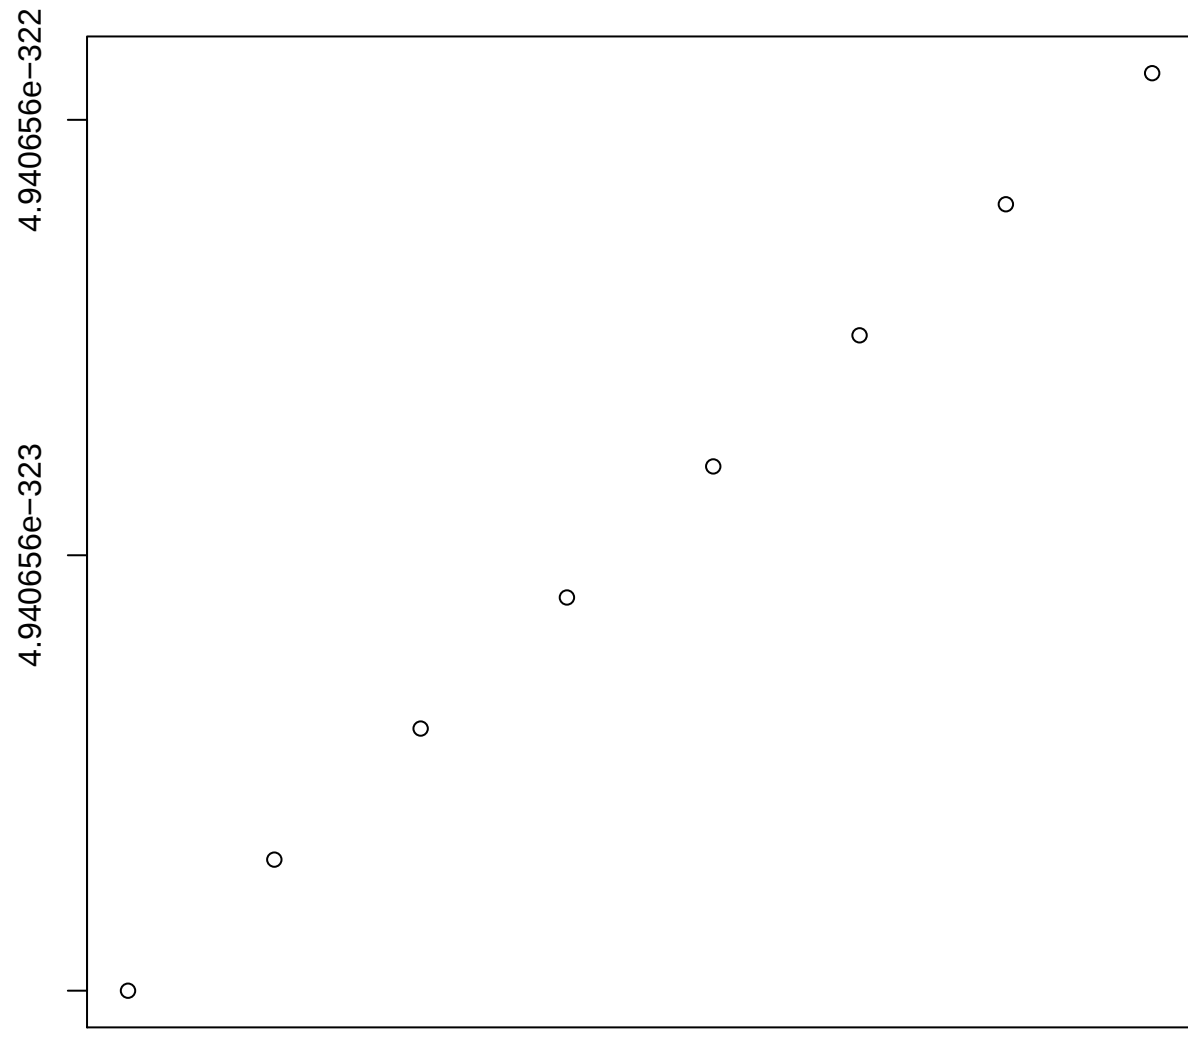



b o

a o

bb Δ

aa Δ

bbb +

aaa +